




FITTINGS

DURALOY PROCESS

DURALOY® FINISHING PROCESS

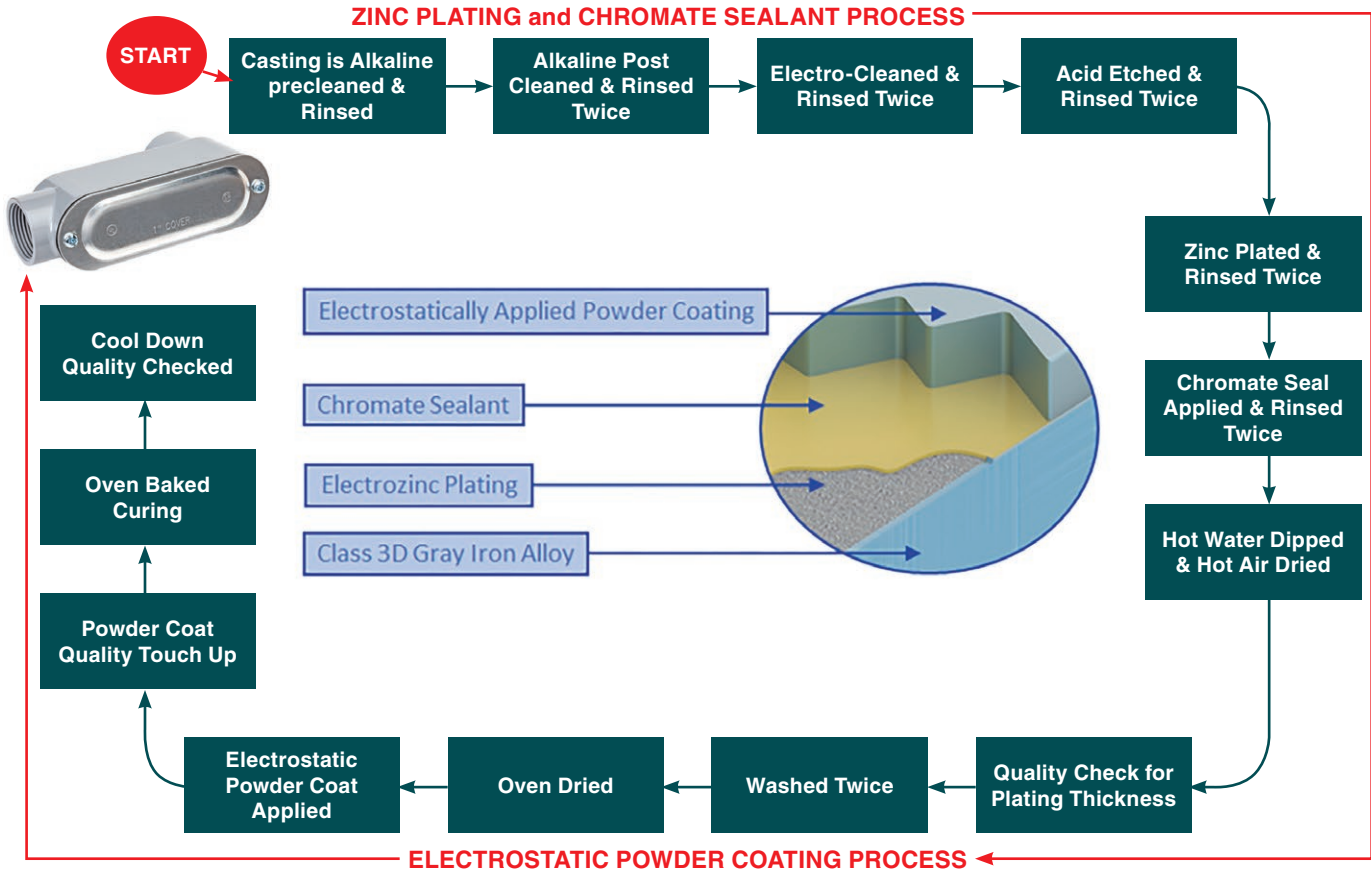

A QUICK GUIDE TO OUR IRON FITTINGS

CHARACTERISTICS	DUCTILE IRON	GRAY IRON
	HAZARDOUS	STANDARD
Castability	None	
Ease of Machining	—	●
Vibration Damping	—	●
Surface Hardenability	None	
Modulus of Elasticity	●	—
Impact Resistance	●	—
Corrosion Resistance	None	
Strength/Weight	●	—
Wear Resistance	None	
Cost of Manufacturing	—	●



IMPROVED CORROSION RESISTANT PAINT ON FITTINGS

Duraloy⁺PLUS

What is Duraloy Plus?

It's Killark's latest paint added to all standard and most hazardous rated fittings series. Its benefits include...

- Silver textured color for interchangeability with competitors
- An enhanced resistance to corrosion

See the results of 1000 hours ASTM 117 salt spray chamber results of old Duraloy[®] to the new Duraloy[®] Plus!



OLD PAINT



Representative samples of old Duraloy[®] paint after 1,000 hours of exposure

NEW PAINT



Representative samples of new Duraloy[®] Plus paint after 1,000 hours of exposure



FITTINGS

WIRE FILL CONDUIT

TRADE SIZE	CATALOG NUMBER	HUB TYPE	WIRE SIZE (AWG, MCM)													
			6	4	3	2	1	1/0	2/0	3/0	4/0	250	300	350	400	500
4" (-0)	OLB-0M*, LB108, MOUB-0, MOT-0, MOLBD-0, MOC-0, MOLB-0	All		58	49	41	31	26	21	18	15	12	10	9	8	3
	OLB-0	All		58	49	41	31	26	21	18	15	12	10	9	3	
	OC-0M*, OLR-0, OLL-0, OT-0M*	All		58	49	41	31	26	21	18	15	12	10	3		
	OC-0, LB107	All		58	49	41	31	26	21	18	15	12	3			
	OR-0, LL107, LR107	All		58	49	41	31	26	21	18	15	3				
	T107, C107	All		58	49	41	31	26	21	3						
3-1/2" (-9)	OLB-9M*, LB98, MOUB-9, MOT-9, MOLBD-9, MOC-9, MOLB-9	All		45	38	32	24	20	16	14	11	9	8	7	6	3
	OLB-9	All		45	38	32	24	20	16	14	11	9	8	7	3	
	OC-9M*, OLR-9, OLL-9, OT-9M*	All		45	38	32	24	20	16	14	11	9	8	3		
	OC-9, LB97	All		45	38	32	24	20	16	14	11	9	3			
	OT-9, LL97, LR97	All		45	38	32	24	20	16	14	11	3				
	T97, C97	All		45	38	32	24	20	16	3						
3" (-8)	MOUB-8, MOT-8, MOLBD-8, MOC-8, MOLB-8	All		34	28	24	18	15	12	10	8	7	6	5	4	3
	OLB-8, OLR-8, OLL-8, C88, LB888, LL888, LR88	All		34	28	24	18	15	12	10	8	7	6	3		
	OC-8, LL87, LR87, T88	All		34	28	24	18	15	12	10	8	3				
	OT-8M*	All		34	28	24	18	15	12	10	3					
	OT-8, LB87	All		34	28	24	18	15	12	3						
	C87, T87, L87	All		34	28	24	18	15	3							
2-1/2" (-7)	OLB-7	All		22	18	15	11	9	8	6	5	4	4	3		
	OLR-7, OLL-7, C78, LB78, LL78, LR78, MOUB-7, MOT-7, MOLBD-7, MOC-7, MOLB-7	All		22	18	15	11	9	8	6	5	4	3			
	OC-7, LL77, LR77, T78	All		22	18	15	11	9	8	6	5	3				
	OT-7M*	All		22	18	15	11	9	8	6	3					
	OT-7, LB77	All		22	18	15	11	9	8	3						
	C77, T77, L77	All		22	18	15	11	9	3							
2" (-6)	OLR-6, OLL-6	All		15	13	11	8	6	5	4	4	3				
	OLB-6M*, C68, LB68, LL68, LR68, MOUB-6, MOT-6, MOLBD-6, MOC-6	All		15	13	11	8	6	5	4	3					
	T68, TB68, X68	THRU		15	13	11	8	6	5	4	3					
	OC-6M*, OLB-6	All		15	13	11	8	6	5	3						
	T68, TB68, X68	SIDE		15	13	11	8	6	5	3						
	OC-6, OX-6	All		15	13	11	8	6	3							
	OT-6M*, OTB-6M*, C67, LB67, LL67, LR67, T67, TA67, TB67, X67	All		15	13	11	8	3								
	OT-6	All		15	13	11	3									
	OTB-6	All		15	3											
1-1/2" (-5)	OC-5, OLB-5, OLR-5, OLL-5, C58, LB58, LL58, LR58, MOUB-5, MOT-5, MOLBD-5, MOC-5	All		9	8	6	5	3								
	T58, TB58, X58	THRU		9	8	6	5	3								
	C57, LB57, LR57, T57, TA57, TB57, X57	All		9	8	6	3									
	T58, TB58, X58	SIDE		9	8	6	3									
	OT-5, OX-5	All		9	8	3										
	OTB-5	All	3													
1-1/4" (-4)	OC-4, OLB-4, OLR-4, OLL-4, OT-4 OX-4, C47, LB47, LL47, T47, TA47, TB47, X47, C448, LB448, LL448, LR448, T448, TB448, X448, MOUB-4, MOT-4, MOLBD-4, MOC-4	All		6	5	3										
	OTB-4	All	3													
1" (-3)	OC-3, OLB-3, OLR-3, OLL-3, OT-3, OTB-3, OX-3, OE-3, C37, E37, LB37, LL37, LR37, LR37, T37, TA37, TB37, X37, C38, LB38, LL38, LR38, T38, TB38, X38, MOUB-3, MOT-3, MOLBD-3, MOC-3	All		3												
	OTA-3	All	3													
3/4" (-2)	OC-2, OLB-2, OLR-2, OLL-2, OT-2, OTA-2, OTB-2, OX-2, OE-2, C27, E27, LB27, LL27, LR27, T27, TA27, TB27, X27, C28, LB28, LL28, LR28, T28, TB28, X28, MOLBD-2	All	3													

CONDUIT BODY DIFFERENCES



A QUICK GLANCE AT THE DIFFERENCE BETWEEN CONDUIT BODIES



FORM 5 (O- SERIES)

- Die cast copper-free aluminum and Iron
- Compact in size with screw covers
- Interchangeable with competitors' Form 5
- Ideal for commercial and heavy industrial locations



DURALOY 7

- Die cast copper-free aluminum and Iron
- Compact in size with Spring Clip Cover with integral gasket
- Interchangeable with competitors' Form 7
- Ideal for Industrial locations



DURALOY 8

- Ductile Iron only
- Screw in cover
- Larger volume for extra wiring capacity
- Thick walls ideal for heavy industrial applications



FITTINGS

O SERIES / DURALOY®5 SERIES

DURALOY®5 CONDUIT BODIES, COVERS, AND GASKETS

DURALOY®5



Type 4 when cover gasketed
Federal Specification W-C 586/A-A 50563
Suitable for use in Class 1 Div. 2
applications when installed in
accordance to NEC Article 501.10



LISTED E3397

Certified LR11852

FEATURES-SPECIFICATIONS

Features

- 419 and tapered hubs specifications
- Type 4 when used with neoprene gasket and cover
- Malleable iron suitable for use in concrete
- Interchangeable with competitive cover/gasket
- Staked stainless steel screws on stamped covers
- 1-1/4" – 4" LB and C hub configurations now available with rollers for relief of pulling conductors
- Killark K-Pak available which neatly packs cover and gasket together with displayed part number and UPC bar code store front displaying
- For conduit body packaged with cover and gasket, add **CG** to the catalog number

Materials

- **BODIES** – Copper-free aluminum or malleable iron
- **GASKETS** – Neoprene standard (fiber and silicone available)
- **COVERS** – Stamped (aluminum or steel) or Cast (iron)
- **COVER SCREWS** – Stainless steel
- **ROLLERS** – Steel

Material Finishes:

- Copper-free aluminum (less than 1/10 of 1%)
 - » Electrostatically applied powder coat paint
- Duraloy malleable gray iron
 - » Tri-coat finish of electro-zinc and chromate sealant with electrostatically applied Duraloy Plus powder coat paint

FITTINGS

O SERIES / DURALOY® 5 SERIES



ALUMINUM OR MALLEABLE IRON CONDUIT BODIES



LL Type



E Type


LL TYPE CONDUIT BODY*

CATALOG NUMBER		HUB SIZE	DIMENSIONS							VOLUME CU. IN.
KILLARK ALUM.	DURALOY IRON		A	B	C	D	E	F	G	
OLL-1	OLL-1M	1/2"	4-5/8" (117)	1-3/8" (35)	2" (51)	1" (25)	3-5/32" (80)	—	5/8" (16)	4.0
OLL-2	OLL-2M	3/4"	5-3/8" (137)	1-5/8" (41)	2-3/16" (56)	1-7/32" (31)	3-25/32" (96)	—	3/4" (19)	7.0
OLL-3	OLL-3M	1"	6-1/4" (159)	2" (51)	2-9/16" (65)	1-15/32" (37)	4-17/32" (115)	—	15/16" (24)	12.0
OLL-4	OLL-4M	1-1/4"	8-1/8" (206)	2-5/8" (67)	3-1/2" (89)	2" (51)	6" (152)	—	1-3/16" (30)	32.0
OLL-5	OLL-5M	1-1/2"	8-1/8" (206)	2-3/4" (70)	3-1/2" (89)	2" (51)	6" (152)	—	1-3/8" (32)	36.0
OLL-6	OLL-6M	2"	10-9/16" (268)	3-1/2" (89)	4-3/16" (106)	2-9/16" (65)	8-1/16" (205)	—	1-5/8" (38)	70.0
OLL-7	OLL-7M	2-1/2"	13-11/16" (348)	4" (102)	5-3/4" (146)	3-11/16" (94)	10-5/8" (270)	—	1-13/16" (46)	142.0
OLL-8	OLL-8M	3"	13-11/16" (348)	4-3/4" (121)	5-3/4" (146)	3-11/16" (94)	10-5/8" (270)	—	2-3/16" (54)	173.0
OLL-9	OLL-9M	3-1/2"	16-1/2" (419)	5-1/2" (140)	7-1/8" (181)	4-7/8" (124)	13-1/8" (333)	—	2-1/2" (67)	292.0
OLL-0	OLL-0M	4"	16-1/2" (419)	5-5/8" (143)	7-1/8" (181)	4-7/8" (124)	13-1/8" (333)	—	2-3/4" (70)	324.0


E TYPE CONDUIT BODY*

CATALOG NUMBER		HUB SIZE	DIMENSIONS							VOLUME CU. IN.
KILLARK ALUM.	DURALOY IRON		A	B	C	D	E	F	G	
OE-1	OE-1M	1/2"	4-5/8" (117)	1-3/8" (35)	1-3/8" (35)	1" (25)	3-9/32" (83)	—	5/8" (16)	4.0
OE-2	OE-2M	3/4"	5-3/8" (41)	1-5/8" (137)	1-5/8" (41)	1-7/32" (29)	3-15/16" (100)	—	3/4" (19)	7.0
OE-3	OE-3M	1"	6-1/4" (159)	2" (51)	1-7/8" (48)	1-15/32" (35)	4-17/32" (115)	—	7/8" (22)	12.0

DIMENSIONS

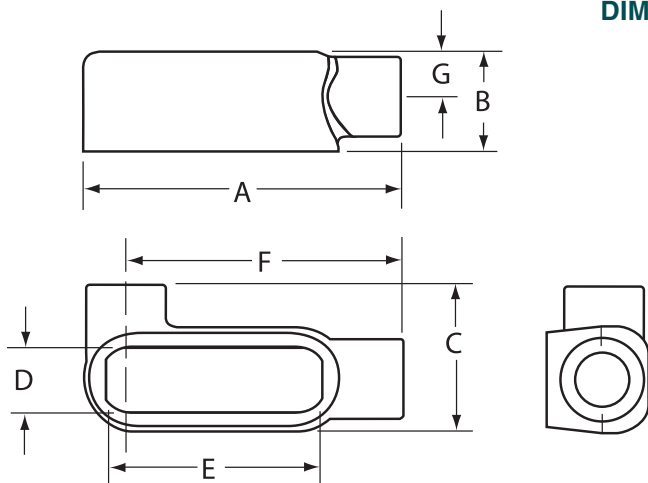

LL Type

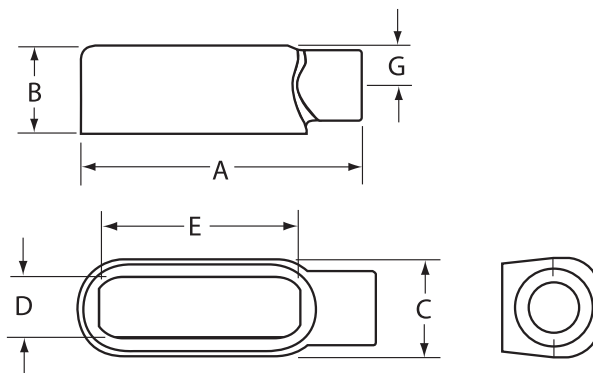

E Type



FITTINGS

O SERIES / DURALOY® 5 SERIES

ALUMINUM OR MALLEABLE IRON CONDUIT BODIES



LB Type



C Type

LB TYPE CONDUIT BODY*

CATALOG NUMBER		HUB SIZE	DIMENSIONS							VOLUME CU. IN.
KILLARK ALUM.	DURALOY IRON		A	B	C	D	E	F	G	
OLB-1	OLB-1M	1/2"	4-17/32" (115)	2-9/32" (83)	1-3/8" (35)	1" (25)	3-5/32" (80)	4-3/8" (111)	5/8" (16)	4.0
OLB-2	OLB-2M	3/4"	5-3/4" (146)	2-1/2" (64)	1-5/8" (41)	1-7/32" (31)	3-25/32" (96)	4-29/32" (125)	3/4" (19)	7.0
OLB-3	OLB-3M	1"	6-5/8" (168)	2-29/32" (74)	1-7/8" (48)	1-15/32" (37)	4-17/32" (115)	5-23/32" (145)	15/16" (24)	12.0
OLB-4	OLB-4M	1-1/4"	7-1/2" (191)	3-3/16" (81)	2-5/8" (67)	2" (51)	6" (152)	6-13/32" (162)	1-3/16" (30)	28.8
OLB-5	OLB-5M	1-1/2"	9-1/8" (232)	4" (102)	2-5/8" (67)	2" (51)	6" (152)	17-3/4" (451)	1-3/8" (32)	36.0
OLB-6	OLB-6M	2"	10" (254)	4-13/16" (122)	3-1/8" (79)	2-9/16" (65)	8-1/16" (205)	8-5/32" (207)	1-5/8" (38)	70.0
OLB-7	OLB-7M	2-1/2"	13-15/16" (354)	6-1/8" (156)	4-3/8" (111)	3-11/16" (94)	10-5/8" (270)	11-7/16" (291)	2-1/2" (64)	142.0
OLB-8	OLB-8M	3"	13-15/16" (354)	6-1/2" (165)	4-3/8" (111)	3-11/16" (94)	10-5/8" (270)	11-7/16" (291)	2-3/16" (54)	173.0
OLB-9	OLB-9M	3-1/2"	16-7/8" (429)	7-9/16" (192)	5-1/2" (140)	4-7/8" (124)	13-1/8" (333)	13-3/4" (349)	2-1/2" (67)	292.0
OLB-0	OLB-0M	4"	16-7/8" (429)	7-13/16" (198)	5-1/2" (140)	4-7/8" (124)	13-1/8" (333)	13-3/4" (349)	2-3/4" (70)	324.0


C TYPE CONDUIT BODY*

CATALOG NUMBER		HUB SIZE	DIMENSIONS							VOLUME CU. IN.
KILLARK ALUM.	DURALOY IRON		A	B	C	D	E	F	G	
OC-1	OC-1M	1/2"	5-3/16" (132)	1-3/8" (35)	1-3/8" (35)	1" (25)	3-5/32" (80)	—	5/8" (16)	4.0
OC-2	OC-2M	3/4"	6-1/8" (156)	1-5/8" (41)	1-5/8" (41)	1-7/32" (31)	3-25/32" (96)	—	3/4" (19)	7.0
OC-3	OC-3M	1"	7-1/8" (181)	2" (51)	1-7/8" (48)	1-15/32" (37)	4-17/32" (115)	—	15/16" (24)	12.0
OC-4	OC-4M	1-1/4"	9-1/8" (232)	2-5/8" (67)	2-5/8" (67)	2" (51)	6" (152)	—	1-3/16" (30)	32.0
OC-5	OC-5M	1-1/2"	9-1/4" (235)	2-3/4" (70)	2-5/8" (67)	2" (51)	6" (152)	—	1-3/8" (32)	36.0
OC-6	OC-6M	2"	11-7/8" (302)	3-1/2" (89)	3-1/8" (79)	2-9/16" (65)	8-1/16" (205)	—	1-5/8" (38)	70.0
OC-7	OC-7M	2-1/2"	15-1/8" (384)	4" (102)	4-3/8" (111)	3-11/16" (94)	10-5/8" (270)	—	1-13/16" (54)	153.0
OC-8	OC-8M	3"	15-1/8" (384)	4-3/4" (121)	4-3/8" (111)	3-11/16" (94)	10-5/8" (270)	—	2-3/16" (54)	181.0
OC-9	OC-9M	3-1/2"	18-3/8" (467)	5-1/2" (140)	5-1/2" (140)	4-7/8" (124)	13-1/8" (333)	—	2-1/2" (67)	290.0
OC-0	OC-0M	4"	18-3/8" (467)	5-5/8" (143)	5-1/2" (140)	4-7/8" (124)	13-1/8" (333)	—	2-3/4" (67)	320.0


DIMENSIONS



Roller option available on 1-1/4" - 4" C & LB **IRON** configurations, add **-WR** to catalog number



LB Type

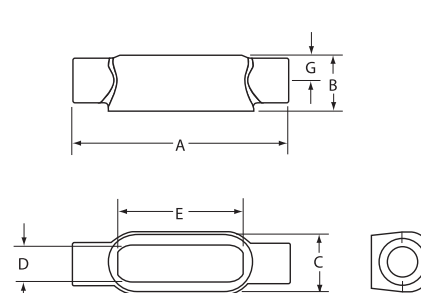

C Type

O SERIES / DURALOY® 5 SERIES



ALUMINUM OR MALLEABLE IRON CONDUIT BODIES



LR Type



T Type


LR TYPE CONDUIT BODY*

CATALOG NUMBER		HUB SIZE	DIMENSIONS							VOLUME CU. IN.
KILLARK ALUM.	DURALOY IRON		A	B	C	D	E	F	G	
OLR-1	OLR-1M	1/2"	4-5/8" (117)	1-3/8" (35)	2" (35)	1" (25)	3-5/32" (80)	4-3/8" (111)	5/8" (16)	4.0
OLR-2	OLR-2M	3/4"	5-3/8" (137)	1-5/8" (41)	2-3/16" (67)	1-7/32" (31)	3-25/32" (96)	4-29/32" (125)	3/4" (19)	7.0
OLR-3	OLR-3M	1"	6-1/4" (159)	2" (51)	2-9/16" (65)	1-15/32" (37)	4-17/32" (115)	5-23/32" (145)	15/16" (24)	12.0
OLR-4	OLR-4M	1-1/4"	8-1/8" (206)	2-5/8" (67)	3-1/2" (89)	2" (51)	6" (152)	6-13/32" (162)	1-3/16" (30)	32.0
OLR-5	OLR-5M	1-1/2"	8-1/8" (206)	2-3/4" (70)	3-1/2" (89)	2" (51)	6" (152)	17-3/4" (451)	1-3/8" (32)	31.0
OLR-6	OLR-6M	2"	10-9/16" (268)	3-1/2" (89)	4-3/16" (106)	2-9/16" (65)	8-1/16" (205)	9-5/32" (233)	1-5/8" (38)	70.0
OLR-7	OLR-7M	2-1/2"	13-11/16" (348)	4" (102)	5-3/4" (146)	3-11/16" (93)	10-5/8" (270)	11-7/16" (291)	1-13/16" (54)	142.0
OLR-8	OLR-8M	3"	13-11/16" (348)	4-3/4" (121)	5-3/4" (146)	3-11/16" (93)	10-5/8" (270)	11-7/16" (291)	2-3/16" (54)	173.0
OLR-9	OLR-9M	3-1/2"	16-1/2" (419)	5-1/2" (140)	7-1/8" (181)	4-7/8" (124)	13-1/8" (333)	13-3/4" (349)	2-1/2" (67)	292.0
OLR-0	OLR-0M	4"	16-1/2" (419)	5-5/8" (143)	7-1/8" (181)	4-7/8" (124)	13-1/8" (333)	13-3/4" (349)	2-3/4" (67)	324.0


T TYPE CONDUIT BODY*

CATALOG NUMBER		HUB SIZE	DIMENSIONS							VOLUME CU. IN.
KILLARK ALUM.	DURALOY IRON		A	B	C	D	E	F	G	
OT-1	OT-1M	1/2"	5-3/8" (137)	1-3/8" (35)	2" (35)	1" (25)	3-5/32" (80)	—	5/8" (16)	4.0
OT-2	OT-2M	3/4"	6-1/16" (154)	1-5/8" (41)	2-3/16" (67)	1-7/32" (31)	3-25/32" (96)	—	3/4" (19)	7.0
OT-3	OT-3M	1"	7-1/8" (181)	2" (51)	2-9/16" (65)	1-15/32" (37)	4-17/32" (115)	—	15/16" (24)	12.0
OT-4	OT-4M	1-1/4"	9-3/16" (233)	2-5/8" (67)	3-1/2" (89)	2" (51)	6" (152)	—	1-3/16" (30)	32.0
OT-5	OT-5M	1-1/2"	9-3/16" (233)	2-3/4" (70)	3-1/2" (89)	2" (51)	6" (152)	—	1-3/8" (32)	33.0
OT-6	OT-6M	2"	11-5/8" (295)	3-1/2" (89)	4-3/16" (106)	2-9/16" (65)	8-1/16" (205)	—	1-5/8" (38)	70.0
OT-7	OT-7M	2-1/2"	15-1/8" (384)	4" (102)	5-3/4" (146)	3-11/16" (94)	10-5/8" (270)	—	1-13/16" (54)	142.0
OT-8	OT-8M	3"	15-1/8" (384)	4-3/4" (121)	5-3/4" (146)	3-11/16" (94)	10-5/8" (270)	—	2-3/16" (54)	173.0
OT-9	OT-9M	3-1/2"	18-1/8" (460)	5-1/2" (140)	7-1/8" (181)	4-7/8" (124)	13-1/8" (333)	—	2-1/2" (67)	292.0
OT-0	OT-0M	4"	18-1/8" (460)	5-5/8" (143)	7-1/8" (181)	4-7/8" (124)	13-1/8" (333)	—	2-3/4" (67)	324.0

DIMENSIONS



LR Type

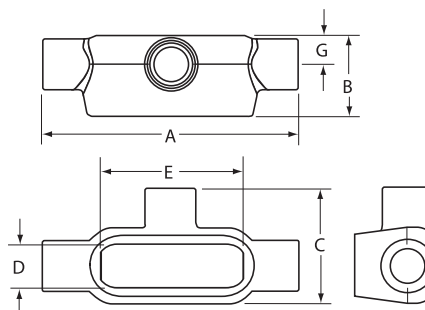

T Type




FITTINGS

O SERIES / DURALOY® 5 SERIES

ALUMINUM OR MALLEABLE IRON CONDUIT BODIES



TB Type

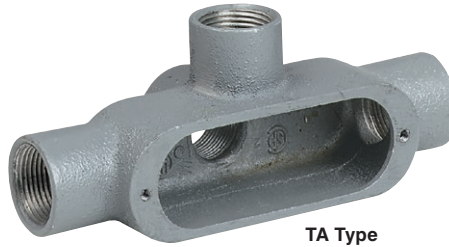

TA Type



X Type

TA TYPE CONDUIT BODY*

CATALOG NUMBER		HUB SIZE	DIMENSIONS							VOLUME CU. IN.
KILLARK ALUM.	DURALOY IRON		A	B	C	D	E	F	G	
OTA-1	OTA-1M	1/2"	5-3/8" (137)	2-1/8" (54)	2" (51)	1" (25)	3-5/32" (80)	—	5/8" (16)	4.0
OTA-2	OTA-2M	3/4"	6-1/16" (154)	2-15/16" (75)	2-3/16" (56)	1-7/32" (29)	3-25/32" (96)	—	3/4" (19)	7.0
—	OTA-3M	1"	7-1/8" (181)	2-11/16" (68)	2-9/16" (65)	1-15/32" (35)	4-17/32" (115)	—	15/16" (24)	12.0


TB TYPE CONDUIT BODY*

CATALOG NUMBER		HUB SIZE	DIMENSIONS							VOLUME CU. IN.
KILLARK ALUM.	DURALOY IRON		A	B	C	D	E	F	G	
OTB-1	OTB-1M	1/2"	5-3/8" (137)	2-1/8" (54)	1-5/16" (33)	1" (25)	3-5/32" (80)	—	5/8" (16)	4.0
OTB-2	OTB-2M	3/4"	6-1/16" (160)	2-5/16" (59)	1-9/16" (40)	1-7/32" (31)	3-25/32" (96)	—	3/4" (19)	7.0
OTB-3	OTB-3M	1"	7-1/8" (181)	2-11/16" (68)	1-13/16" (46)	1-15/32" (37)	4-17/32" (115)	—	15/16" (24)	12.0
OTB-4	OTB-4M	1-1/4"	9-3/16" (233)	3-9/16" (90)	2-1/2" (64)	2" (51)	6" (152)	—	1-3/16" (30)	32.0
OTB-5	OTB-5M	1-1/2"	9-3/16" (233)	3-3/4" (92)	2-1/2" (64)	2" (51)	6" (152)	—	1-3/8" (35)	36.0
OTB-6	OTB-6M	2"	11-5/8" (295)	4-5/8" (117)	3-1/8" (79)	2-9/16" (65)	8-1/16" (205)	—	1-5/8" (41)	70.0


X TYPE CONDUIT BODY*

CATALOG NUMBER		HUB SIZE	DIMENSIONS							VOLUME CU. IN.
KILLARK ALUM.	DURALOY IRON		A	B	C	D	E	F	G	
OX-1	OX-1M	1/2"	5-3/8" (137)	1-3/4" (44)	1-11/16" (43)	1" (25)	3-5/32" (80)	—	5/8" (16)	4.0
OX-2	OX-2M	3/4"	6-1/16" (160)	2" (51)	2-7/8" (73)	1-7/32" (31)	3-25/32" (96)	—	3/4" (19)	7.0
OX-3	OX-3M	1"	7-1/8" (181)	2-1/4" (57)	3-3/8" (86)	1-15/32" (37)	4-17/32" (115)	—	15/16" (24)	12.0
OX-4	OX-4M	1-1/4"	9-3/16" (233)	2-9/16" (65)	4-1/2" (114)	2" (51)	6" (152)	—	1-3/16" (30)	32.0
OX-5	OX-5M	1-1/2"	9-3/16" (233)	2-3/4" (70)	4-1/2" (114)	2" (51)	6" (152)	—	1-3/8" (35)	36.0
OX-6	OX-6M	2"	11-5/8" (295)	3-3/8" (85)	5-1/4" (133)	2-9/16" (65)	8-1/16" (205)	—	1-5/8" (41)	70.0


DIMENSIONS

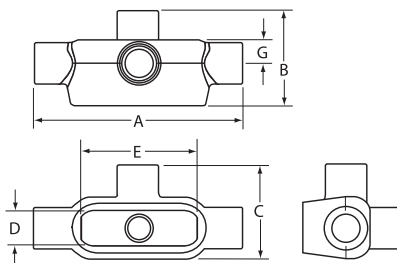

TA Type

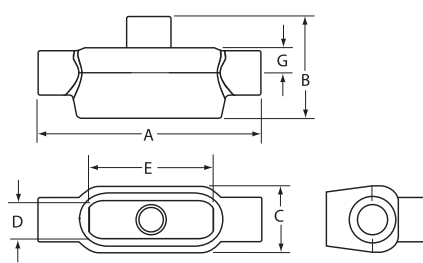

TB Type

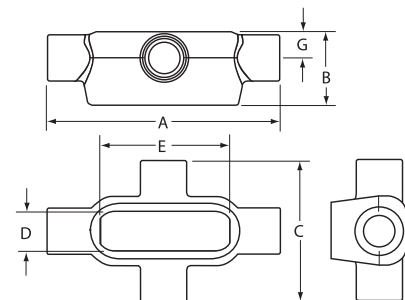

X Type


FITTINGS O SERIES / DURALOY® 5 SERIES




COVERS AND GASKETS



Aluminum and Steel Stamped Covers

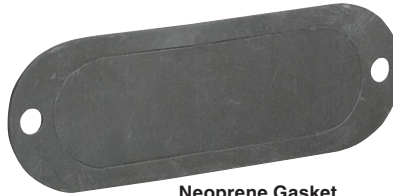


Neoprene Gasket

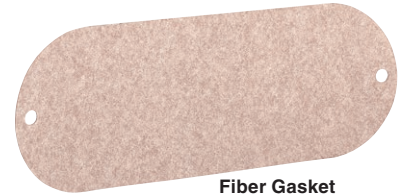

Fiber Gasket



Cast Iron Covers



Adhered Integral gasket to cover

COVER

Stamped Material/Finish

Copper-free Aluminum (less than 4/10 of 1%)

- Natural finish
- 300 Series stainless steel screws

Galvanized Steel

- Natural finish
- 300 Series stainless steel screws
- Stamped Aluminum & Steel covers now available with integral adhesive gasketing

Cast Material/Finish

Duraloy Malleable Iron

- Tri-coat finish of electrozinc, chromate sealant, and electrostatically applied powder coating
- 300 Series stainless steel screws

ALUMINUM AND STEEL STAMPED COVERS							
CATALOG NUMBER				HUB SIZE	DIMENSIONS		
KILLARK ALUMINUM		STEEL			LENGTH	WIDTH	HEIGHT
	WITH INT. GASKET		WITH INT. GASKET				
OL-10	OL-10G	OL-10M	OL-10MG	1/2"	3-15/16"(100)	1-3/8"(35)	3/8"(10)
OL-20	OL-20G	OL-20M	OL-20MG	3/4"	4-5/8"(117)	1-5/8"(41)	3/8"(10)
OL-30	OL-30G	OL-30M	OL-30MG	1"	5-3/8"(137)	1-7/8"(48)	5/8"(16)
OL-450	OL-450G	OL-45M	OL-45MG	1-1/4"	7-3/16"(183)	2-5/8"(67)	5/8"(16)
OL-450	OL-450G	OL-45M	OL-45MG	1-1/2"	7-3/16"(183)	2-5/8"(67)	5/8"(16)
OL-60	OL-60G	OL-60M	OL-60MG	2"	9-1/2"(241)	3-1/8"(79)	5/8"(16)
OL-780	OL-780G	OL-78M	OL-78MG	2-1/2"	12-1/4"(311)	4-3/8"(111)	5/8"(16)
OL-780	OL-780G	OL-78M	OL-78MG	3"	12-1/4"(311)	4-3/8"(111)	5/8"(16)
OL-900	OL-900G	OL-90M	OL-90MG	3-1/2"	14-7/8"(378)	5-1/2"(140)	5/8"(16)
OL-900	OL-900G	OL-90M	OL-90MG	4"	14-7/8"(378)	5-1/2"(140)	5/8"(16)

CAST IRON COVERS				
CATALOG NUMBER	HUB SIZE	DIMENSIONS		
		LENGTH	WIDTH	HEIGHT
OL-10CM	1/2"	3-15/16"(100)	1-3/8"(35)	3/8"(10)
OL-20CM	3/4"	4-5/8"(117)	1-5/8"(41)	3/8"(10)
OL-30CM	1"	5-3/8"(137)	1-7/8"(48)	5/8"(16)
OL-45CM	1-1/4"	7-3/16"(183)	2-5/8"(67)	5/8"(16)
OL-45CM	1-1/2"	7-3/16"(183)	2-5/8"(67)	5/8"(16)
OL-60CM	2"	9-1/2"(241)	3-1/8"(79)	5/8"(16)
OL-78CM	2-1/2"	12-1/4"(311)	4-3/8"(111)	5/8"(16)
OL-78CM	3"	12-1/4"(311)	4-3/8"(111)	5/8"(16)
OL-90CM	3-1/2"	14-7/8"(378)	5-1/2"(140)	5/8"(16)
OL-90CM	4"	14-7/8"(378)	5-1/2"(140)	5/8"(16)

GASKET

Material/Finish

- Neoprene, fiber, or silicone

GASKETS			
HUB SIZE	CATALOG NUMBER		
	NEOPRENE	FIBER	SILICONE
1/2"	OLK-1RG	OLK-1VG	OLK-1-SG
3/4"	OLK-2RG	OLK-2VG	OLK-2-SG
1"	OLK-3RG	OLK-3VG	OLK-3-SG
1-1/4"	OL-45-RG	OL-45-VG	OL-45-SG
1-1/2"	OL-45-RG	OL-45-VG	OL-45-SG
2"	OL-6-RG	OL-6-VG	OL-6-SG
2-1/2"	OL-78-RG	OL-78-VG	OL-78-SG
3"	OL-78-RG	OL-78-VG	OL-78-SG
3-1/2"	OL-90-RG	OL-90-VG	—
4"	OL-90-RG	OL-90-VG	—



FITTINGS

DURALOY® 7 SERIES

ALUMINUM OR IRON CONDUIT BODIES

DURALOY® 7



Suitable for wet locations when used with gasketed covers.

Federal Specification
W-C-586D/A-A 50563.

Suitable for use in hazardous location applications when installed according to NEC Articles 501.10(b), Class I, Div. 2, (Suitable for use in Class I Zone 2 applications) 502.10 and 503.10.

 LISTED E3397

 Certified LR11852

FEATURES-SPECIFICATIONS

Features

- Intermateability UL Listed and CSA Certified interchangeability with competitive products
- Enhanced sealing capabilities with neoprene sealing gaskets provide a Type 4 Seal
- High-quality sealing hardware 316 stainless steel cover screws and washers with neoprene gaskets
- Suitable for wet locations when used with gaskets
- Innovative spring clip design for installation ease and repeat usage
- Smooth integral wire bushings protect cable from damage when wires are pulled through opening
- For use with threaded rigid conduit steel or aluminum
- Flat-back design for greater wiring capacity and mounting stability

Materials

Aluminum

- Copper-free aluminum (less than 4/10 of 1%)
 - » Electrostatically applied powder coat paint

Duraloy Iron

- Duraloy malleable gray iron
 - » Tri-coat finish of electro-zinc and chromate sealant with electrostatically applied Duraloy Plus powder coat paint



ALUMINUM OR IRON CONDUIT BODIES




LR Type

LR TYPE CONDUIT BODY*										
CATALOG NUMBER		HUB SIZE	DIMENSIONS							VOLUME CU. IN.
KILLARK ALUM.	DURALOY IRON		A	B	C	D	E	F	G	
LR17SA	LR17	1/2"	4-11/16" (119)	1-7/16" (37)	2-5/16" (59)	1" (25)	3-3/16" (81)	4-1/16" (103)	5/8" (16)	4.0
LR27SA	LR27	3/4"	5-3/8" (137)	1-11/16" (43)	2-5/8" (67)	1-1/8" (29)	3-13/16" (97)	4-5/8" (117)	3/4" (19)	7.0
LR37SA	LR37	1"	6-5/16" (160)	1-7/8" (48)	3-1/16" (78)	1-3/8" (35)	4-1/2" (114)	5-3/8" (137)	7/8" (22)	11.0
LR47SA	LR47	1-1/4"	6-13/16" (173)	2-5/16" (59)	3-1/2" (89)	1-13/16" (46)	5" (127)	5-3/4" (146)	1-1/8" (29)	19.5
LR57SA	LR57	1-1/2"	7-1/4" (184)	2-9/16" (65)	3-11/16" (94)	2-1/16" (52)	5-7/16" (138)	6-1/16" (154)	1-1/4" (32)	26.0
LR67SA	LR67	2"	8-1/4" (210)	3-1/8" (79)	4-1/4" (108)	2-5/8" (67)	6-3/8" (162)	6-3/4" (171)	1-1/2" (38)	48.0
LR77SA	LR77	2-1/2"	10-15/16" (278)	4-3/8" (111)	6-3/16" (157)	3-7/8" (98)	8-3/8" (213)	8-3/4" (222)	2-1/8" (54)	131.5
LR87SA	LR87	3"	10-15/16" (278)	4-3/8" (111)	6-3/16" (157)	3-7/8" (98)	8-3/8" (213)	8-3/4" (222)	2-1/8" (54)	131.5
LR97SA	LR97	3-1/2"	13" (330)	5-3/8" (137)	7-1/4" (184)	4-3/4" (121)	10-1/4" (260)	10-5/16" (262)	2-5/8" (67)	238.0
LR107SA	LR107	4"	13" (330)	5-3/8" (137)	7-1/4" (184)	4-3/4" (121)	10-1/4" (260)	10-5/16" (262)	2-5/8" (67)	238.0

* For conduit body packaged with cover and gasket, add **CG** to the catalog number.

DIMENSIONS

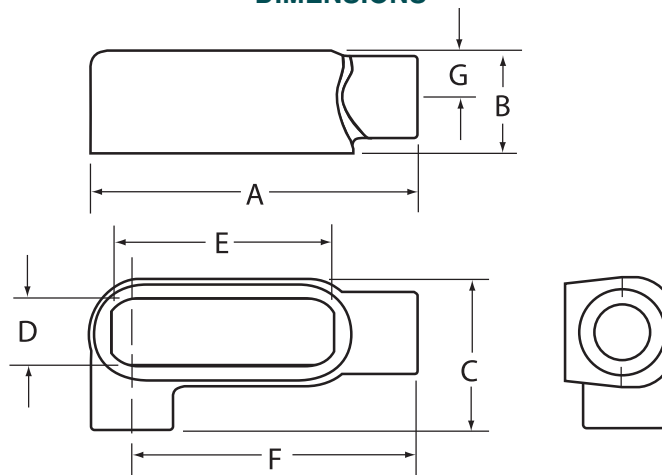


LR Type



FITTINGS

DURALOY® 7 SERIES

ALUMINUM OR IRON CONDUIT BODIES

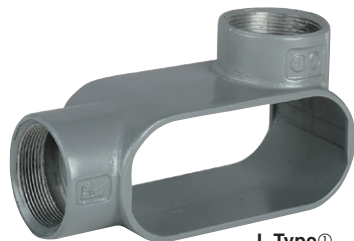

L Type^①



T Type

L TYPE^① CONDUIT BODY*

CATALOG NUMBER		HUB SIZE	DIMENSIONS							VOLUME CU. IN.
KILLARK ALUM.	DURALOY IRON		A	B	C	D	E	F	G	
L17SA	L17	1/2"	4-11/16" (119)	1-7/16" (37)	2-5/16" (59)	1" (25)	3-3/16" (81)	4-1/16" (103)	5/8" (16)	4.0
L27SA	L27	3/4"	5-3/8" (137)	1-11/16" (43)	2-5/8" (67)	1-1/8" (29)	3-13/16" (97)	4-5/8" (117)	3/4" (19)	7.0
L37SA	L37	1"	6-5/16" (160)	1-7/8" (48)	3-1/16" (78)	1-3/8" (35)	4-1/2" (114)	5-3/8" (137)	7/8" (22)	11.0
L47SA	L47	1-1/4"	6-13/16" (173)	2-5/16" (59)	3-1/2" (89)	1-13/16" (46)	5" (127)	5-3/4" (146)	1-1/8" (29)	19.5
L57SA	L57	1-1/2"	7-1/4" (184)	2-9/16" (65)	3-11/16" (94)	2-1/16" (52)	5-7/16" (138)	6-1/16" (154)	1-1/4" (32)	26.0
L67SA	L67	2"	8-1/4" (210)	3-1/8" (79)	4-1/4" (108)	2-5/8" (67)	6-3/8" (162)	6-3/4" (171)	1-1/2" (38)	48.0
L77SA	L77	2-1/2"	10-15/16" (278)	4-3/8" (111)	6-3/16" (157)	3-7/8" (98)	8-3/8" (213)	8-3/4" (222)	2-1/8" (54)	131.5
L87SA	L87	3"	10-15/16" (278)	4-3/8" (111)	6-3/16" (157)	3-7/8" (98)	8-3/8" (213)	8-3/4" (222)	2-1/8" (54)	131.5


① L type is double faced and may be used as LL or LR. Has 2 openings, one of which is furnished with a blank sheet cover.

T TYPE CONDUIT BODY*


CATALOG NUMBER		HUB SIZE	DIMENSIONS							VOLUME CU. IN.
KILLARK ALUM.	DURALOY IRON		A	B	C	D	E	F	G	
T17SA	T17	1/2"	5-11/16" (000)	1-13/16" (46)	2-1/2" (64)	1" (25)	3-3/16" (81)	—	5/8" (16)	6.2
T27SA	T27	3/4"	6-5/16" (000)	2-1/16" (52)	2-3/4" (67)	1-1/8" (29)	3-13/16" (97)	—	3/4" (19)	9.5
T37SA	T37	1"	7-5/8" (194)	2-1/4" (57)	3-1/4" (83)	1-3/8" (35)	4-1/2" (114)	—	7/8" (22)	11.5
T47SA	T47	1-1/4"	8" (203)	2-5/16" (59)	3-1/2" (89)	1-13/16" (46)	5" (127)	—	1-1/8" (29)	20.0
T57SA	T57	1-1/2"	8-7/16" (214)	2-9/16" (65)	3-11/16" (94)	2-1/16" (52)	5-7/16" (138)	—	1-1/4" (32)	27.0
T67SA	T67	2"	9-7/16" (240)	3-1/8" (79)	4-1/4" (108)	2-5/8" (67)	6-3/8" (162)	—	1-1/2" (38)	50.0
T77SA	T77	2-1/2"	12-3/4" (324)	4-3/8" (111)	6-3/16" (157)	3-7/8" (98)	8-3/8" (213)	—	2-1/8" (54)	134.0
T87SA	T87	3"	12-3/4" (324)	4-3/8" (111)	6-3/16" (157)	3-7/8" (98)	8-3/8" (213)	—	2-1/8" (54)	134.0
T97SA	T97	3-1/2"	14-7/8" (378)	5-3/8" (137)	7-1/4" (184)	4-3/4" (121)	10-1/4" (260)	—	2-5/8" (67)	238.0
T107SA	T107	4"	14-7/8" (378)	5-3/8" (137)	7-1/4" (184)	4-3/4" (121)	10-1/4" (260)	—	2-5/8" (67)	238.0

* For conduit body packaged with cover and gasket, add **CG** to the catalog number.

DIMENSIONS



L Type

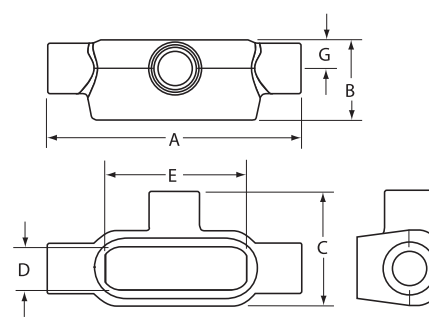

T Type



ALUMINUM OR IRON CONDUIT BODIES



TA Type



E Type



TB Type

E TYPE CONDUIT BODY*

CATALOG NUMBER		HUB SIZE	DIMENSIONS							VOLUME CU. IN.
KILLARK ALUM.	DURALOY IRON		A	B	C	D	E	F	G	
E17SA	E17	1/2"	4-11/16" (119)	1-7/16" (37)	1-1/2" (38)	1" (25)	3-3/16" (81)	—	5/8" (16)	4.0
E27SA	E27	3/4"	5-3/8" (137)	1-11/16" (43)	1-3/4" (67)	1-1/8" (29)	3-13/16" (97)	—	3/4" (19)	7.0
E37SA	E37	1"	6-5/16" (160)	1-7/8" (48)	1-15/16" (49)	1-3/8" (35)	4-1/2" (114)	—	7/8" (22)	11.0

TA TYPE CONDUIT BODY*




CATALOG NUMBER		HUB SIZE	DIMENSIONS							VOLUME CU. IN.
KILLARK ALUM.	DURALOY IRON		A	B	C	D	E	F	G	
TA17SA	TA17	1/2"	5-11/16" (144)	2-5/8" (67)	2-1/2" (64)	1" (25)	3-3/16" (81)	—	5/8" (16)	6.2
TA27SA	TA27	3/4"	6-5/16" (160)	2-7/8" (73)	2-3/4" (67)	1-1/8" (29)	3-13/16" (97)	—	3/4" (19)	9.5
TA37SA	TA37	1"	7-5/8" (194)	3-3/8" (86)	3-1/4" (100)	1-3/8" (35)	4-1/2" (114)	—	7/8" (22)	15.5
TA47SA	TA47	1-1/4"	8" (203)	3-1/2" (89)	3-1/2" (89)	1-13/16" (46)	5" (127)	—	1-1/8" (32)	20.0
TA57SA	TA57	1-1/2"	8-7/16" (214)	3-3/4" (95)	3-11/16" (94)	2-1/16" (52)	5-7/16" (138)	—	1-1/4" (32)	27.0
TA67SA	TA67	2"	9-7/16" (240)	4-5/16" (110)	4-1/4" (108)	2-5/8" (67)	6-3/8" (162)	—	1-1/2" (38)	50.0

TB TYPE CONDUIT BODY*

CATALOG NUMBER		HUB SIZE	DIMENSIONS							VOLUME CU. IN.
KILLARK ALUM.	DURALOY IRON		A	B	C	D	E	F	G	
TB17SA	TB17	1/2"	5-11/16" (144)	2-5/8" (67)	1-11/16" (43)	1" (25)	3-3/16" (81)	—	5/8" (16)	6.2
TB27SA	TB27	3/4"	6-5/16" (160)	2-7/8" (73)	1-7/8" (67)	1-1/8" (29)	3-13/16" (97)	—	3/4" (19)	9.5
TB37SA	TB37	1"	7-5/8" (194)	3-3/8" (86)	3-3/8" (86)	1-3/8" (35)	4-1/2" (114)	—	7/8" (22)	15.5
TB47SA	TB47	1-1/4"	8" (203)	3-1/2" (89)	3-1/2" (89)	1-13/16" (46)	5" (127)	—	1-1/8" (29)	20.0
TB57SA	TB57	1-1/2"	8-7/16" (214)	3-3/4" (95)	3-3/4" (95)	2-1/16" (52)	5-7/16" (138)	—	1-1/4" (32)	27.0
TB67SA	TB67	2"	9-7/16" (240)	4-5/16" (110)	4-5/16" (110)	2-5/8" (67)	6-3/8" (162)	—	1-1/2" (38)	50.0

* For conduit body packaged with cover and gasket, add **CG** to the catalog number.

DIMENSIONS

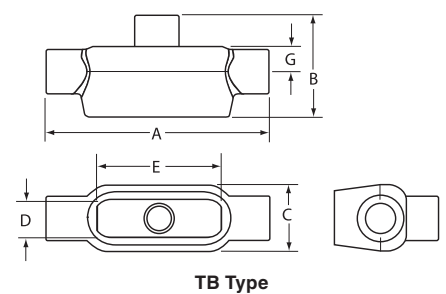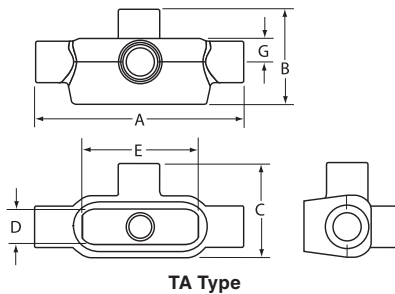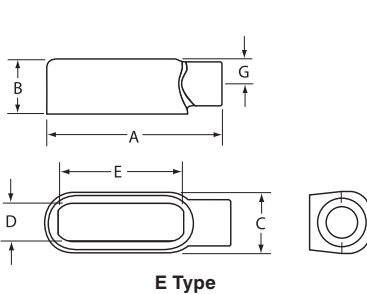



FITTINGS

DURALOY® 7 SERIES

ALUMINUM OR IRON CONDUIT BODIES



X Type



C Type

X TYPE CONDUIT BODY*


CATALOG NUMBER		HUB SIZE	DIMENSIONS							VOLUME CU. IN.
KILLARK ALUM.	DURALOY IRON		A	B	C	D	E	F	G	
X17SA	X17	1/2"	5-11/16" (144)	1-3/8" (35)	3-3/8" (86)	1" (25)	3-3/16" (81)	—	5/8" (16)	6.2
X27SA	X27	3/4"	6-5/16" (160)	2-1/16" (52)	3-9/16" (67)	1-1/8" (29)	3-13/16" (97)	—	3/4" (19)	9.5
X37SA	X37	1"	7-5/8" (194)	2-1/4" (57)	4-3/8" (111)	1-3/8" (35)	4-1/2" (114)	—	7/8" (22)	15.5
X47SA	X47	1-1/4"	8" (203)	2-5/16" (59)	4-11/16" (100)	1-13/16" (46)	5" (127)	—	1-1/8" (29)	20.0
X57SA	X57	1-1/2"	8-7/16" (214)	2-9/16" (65)	4-7/8" (124)	2-1/16" (52)	5-7/16" (138)	—	1-1/4" (32)	27.0
X67SA	X67	2"	9-7/16" (240)	3-1/8" (79)	5-7/16" (138)	2-5/8" (67)	6-3/8" (162)	—	1-1/2" (38)	50.0

C TYPE CONDUIT BODY*


CATALOG NUMBER		HUB SIZE	DIMENSIONS							VOLUME CU. IN.
KILLARK ALUM.	DURALOY IRON		A	B	C	D	E	F	G	
C17SA	C17	1/2"	5-1/2" (140)	1-7/16" (37)	1-1/2" (38)	1" (25)	3-3/16" (81)	—	5/8" (16)	4.0
C27SA	C27	3/4"	6-3/16" (157)	1-11/16" (43)	1-3/4" (67)	1-1/8" (29)	3-13/16" (97)	—	3/4" (19)	7.0
C37SA	C37	1"	7-7/16" (189)	1-7/8" (48)	1-15/16" (49)	1-3/8" (35)	4-1/2" (114)	—	7/8" (22)	11.0
C47SA	C47	1-1/4"	8" (203)	2-5/16" (59)	2-5/16" (59)	1-13/16" (46)	5" (127)	—	1-1/8" (29)	19.5
C57SA	C57	1-1/2"	8-7/16" (214)	2-9/16" (65)	2-1/2" (64)	2-1/16" (52)	5-7/16" (138)	—	1-1/4" (32)	26.0
C67SA	C67	2"	9-7/16" (240)	3-1/8" (79)	3-1/16" (78)	2-5/8" (67)	6-3/8" (162)	—	1-1/2" (38)	48.0
C77SA	C77	2-1/2"	12-3/4" (324)	4-3/8" (111)	4-3/8" (111)	3-7/8" (98)	8-3/8" (213)	—	2-1/8" (54)	131.5
C87SA	C87	3"	12-3/4" (324)	4-3/8" (111)	4-3/8" (111)	3-7/8" (98)	8-3/8" (213)	—	2-1/8" (54)	131.5
C97SA	C97	3-1/2"	14-7/8" (378)	5-3/8" (137)	5-3/8" (137)	4-3/4" (121)	10-1/4" (260)	—	2-5/8" (67)	238.0
C107SA	C107	4"	14-7/8" (378)	5-3/8" (137)	5-3/8" (137)	4-3/4" (121)	10-1/4" (260)	—	2-5/8" (67)	238.0

* For conduit body packaged with cover and gasket, add **CG** to the catalog number.

DIMENSIONS

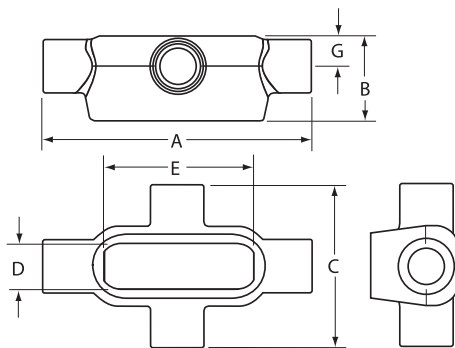

X Type

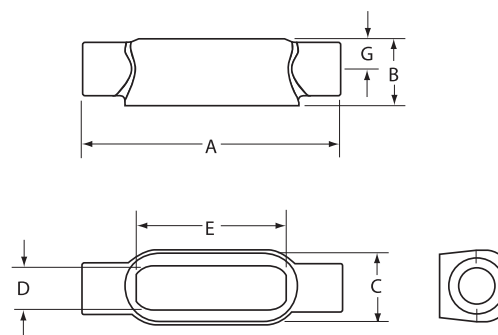

C Type



ALUMINUM OR IRON CONDUIT BODIES



LB Type



LL Type

LB TYPE CONDUIT BODY*


CATALOG NUMBER		HUB SIZE	DIMENSIONS							VOLUME CU. IN.
KILLARK ALUM.	DURALOY IRON		A	B	C	D	E	F	G	
LB17SA	LB17	1/2"	4-11/16" (119)	2-1/4" (57)	1-1/2" (38)	1" (25)	3-3/16" (81)	4-1/16" (103)	5/8" (16)	4.0
LB27SA	LB27	3/4"	5-3/8" (137)	2-1/2" (64)	1-3/4" (67)	1-1/8" (29)	3-13/16" (97)	4-5/8" (117)	3/4" (19)	7.0
LB37SA	LB37	1"	6-5/16" (160)	3" (76)	1-15/16" (49)	1-3/8" (35)	4-1/2" (114)	5-3/8" (137)	7/8" (22)	11.0
LB47SA	LB47	1-1/4"	6-13/16" (173)	3-1/2" (89)	2-5/16" (59)	1-13/16" (46)	5" (127)	5-3/4" (146)	1-1/8" (29)	19.5
LB57SA	LB57	1-1/2"	7-1/4" (184)	3-3/4" (95)	2-1/2" (64)	2-1/16" (52)	5-7/16" (138)	6-1/16" (154)	1-1/4" (32)	26.0
LB67SA	LB67	2"	8-1/4" (210)	4-5/16" (109)	3-1/16" (78)	2-5/8" (67)	6-3/8" (162)	6-3/4" (171)	1-1/2" (38)	48.0
LB77SA	LB77	2-1/2"	10-15/16" (278)	6-3/16" (157)	4-3/8" (111)	3-7/8" (98)	8-3/8" (213)	8-3/4" (222)	2-1/8" (54)	131.5
LB87SA	LB87	3"	10-15/16" (278)	6-3/16" (157)	4-3/8" (111)	3-7/8" (98)	8-3/8" (213)	8-3/4" (222)	2-1/8" (54)	131.5
LB97SA	LB97	3-1/2"	13" (330)	7-1/4" (184)	5-3/8" (137)	4-3/4" (121)	10-1/4" (260)	10-5/16" (262)	2-5/8" (67)	238.0
LB107SA	LB107	4"	13" (330)	7-1/4" (184)	5-3/8" (137)	4-3/4" (121)	10-1/4" (260)	10-5/16" (262)	2-5/8" (67)	238.0

LL TYPE CONDUIT BODY*

CATALOG NUMBER		HUB SIZE	DIMENSIONS							VOLUME CU. IN.
KILLARK ALUM.	DURALOY IRON		A	B	C	D	E	F	G	
LL17SA	LL17	1/2"	4-11/16" (119)	1-7/16" (37)	2-5/16" (59)	1" (25)	3-3/16" (81)	4-1/16" (103)	5/8" (16)	4.0
LL27SA	LL27	3/4"	5-3/8" (137)	1-11/16" (43)	2-5/8" (67)	1-1/8" (29)	3-13/16" (97)	4-5/8" (117)	3/4" (19)	7.0
LL37SA	LL37	1"	6-5/16" (160)	1-7/8" (48)	3-1/16" (78)	1-3/8" (35)	4-1/2" (114)	5-3/8" (137)	7/8" (22)	11.0
LL47SA	LL47	1-1/4"	6-13/16" (173)	2-5/16" (59)	3-1/2" (89)	1-13/16" (46)	5" (127)	5-3/4" (146)	1-1/8" (29)	19.5
LL57SA	LL57	1-1/2"	7-1/4" (184)	2-9/16" (65)	3-11/16" (94)	2-1/16" (52)	5-7/16" (138)	6-1/16" (154)	1-1/4" (32)	26.0
LL67SA	LL67	2"	8-1/4" (210)	3-1/8" (79)	4-1/4" (108)	2-5/8" (67)	6-3/8" (162)	6-3/4" (171)	1-1/2" (38)	48.0
LL77SA	LL77	2-1/2"	10-15/16" (278)	4-3/8" (111)	6-3/16" (157)	3-7/8" (98)	8-3/8" (213)	8-3/4" (222)	2-1/8" (54)	131.5
LL87SA	LL87	3"	10-15/16" (278)	4-3/8" (111)	6-3/16" (157)	3-7/8" (98)	8-3/8" (213)	8-3/4" (222)	2-1/8" (54)	131.5
LL97SA	LL97	3-1/2"	13" (330)	5-3/8" (137)	7-1/4" (184)	4-3/4" (121)	10-1/4" (260)	10-5/16" (262)	2-5/8" (67)	238.0
LL107SA	LL107	4"	13" (330)	5-3/8" (137)	7-1/4" (184)	4-3/4" (121)	10-1/4" (260)	10-5/16" (262)	2-5/8" (67)	238.0

* For conduit body packaged with cover and gasket, add **CG** to the catalog number.

DIMENSIONS

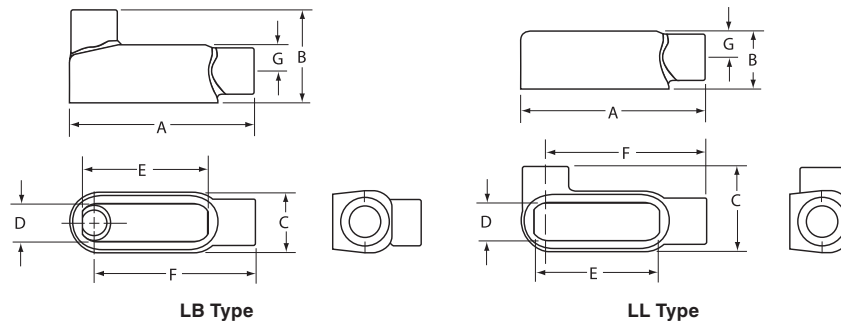



FITTINGS

DURALOY® 7 SERIES

ALUMINUM AND STEEL COVERS AND GASKETS



Stamped Covers



Stamped Covers with
Integral Neoprene Gasket



Cast Covers



Cast Covers with Integral
Neoprene Gasket

Stamped Material/Finish

Aluminum

- Gasketed 316 stainless steel screws
- Natural finish

Galvanized Steel

- 316 stainless steel screws
- Natural finish

Gasket

- Neoprene

STAMPED ALUMINUM AND STAMPED STEEL COVERS WITHOUT AND WITH GASKETS							
CATALOG NUMBER				HUB SIZE	DIMENSIONS		
ALUMINUM W/O GASKET	ALUMINUM W/GASKET	STEEL W/O GASKET	STEEL W/ GASKET		LENGTH	WIDTH	HEIGHT*
170SA	170GSA	170	170G	1/2"	3-11/16" (94)	1-3/8" (35)	5/16" (8)
270SA	270GSA	270	270G	3/4"	4-1/4" (108)	1-1/2" (32)	5/16" (8)
370SA	370GSA	370	370G	1"	5" (127)	1-3/4" (44)	5/16" (8)
470SA	470GSA	470	470G	1-1/4"	5-1/2" (140)	2-3/16" (56)	5/16" (8)
570SA	570GSA	570	570G	1-1/2"	6" (152)	2-7/16" (62)	5/16" (8)
670SA	670GSA	670	670G	2"	7" (178)	3" (76)	5/16" (8)
870SA	870GSA	870	870G	2-1/2"	9" (229)	4-1/4" (108)	9/16" (14)
870SA	870GSA	870	870G	3"	9" (229)	4-1/4" (108)	9/16" (14)
970SA	970GSA	970	970G	3-1/2"	11" (279)	5-1/4" (133)	9/16" (14)
970SA	970GSA	970	970G	4"	11" (279)	5-1/4" (133)	9/16" (14)

* For covers with integral gasket, add 1/8" (3) to height.

Cast Material/Finish

Copper-free Aluminum

(less than 1% of 1%)

- Electrostatically applied powder coating

Duraloy Gray Iron Alloy

- Duraloy malleable gray iron
 - » Tri-coat finish of electro-zinc and chromate sealant with electrostatically applied Duraloy Plus powder coat paint
- Gasketed 316 stainless steel screws

Gasket


- Neoprene

CAST ALUMINUM AND CAST IRON COVERS WITHOUT AND WITH GASKETS							
CATALOG NUMBER				HUB SIZE	DIMENSIONS		
ALUMINUM W/O GASKET	ALUMINUM W/GASKET	IRON W/O GASKET	IRON W/ GASKET		LENGTH	WIDTH	HEIGHT*
170CSA	170CGSA	170C	170CG	1/2"	3-11/16" (94)	1-3/8" (35)	5/16" (8)
270CSA	270CGSA	270C	270CG	3/4"	4-1/4" (108)	1-1/2" (32)	5/16" (8)
370CSA	370CGSA	370C	370CG	1"	5" (127)	1-3/4" (44)	5/16" (8)
470CSA	470CGSA	470C	470CG	1-1/4"	5-1/2" (140)	2-3/16" (56)	5/16" (8)
570CSA	570CGSA	570C	570CG	1-1/2"	6" (152)	2-7/16" (62)	5/16" (8)
670CSA	670CGSA	670C	670CG	2"	7" (178)	3" (76)	5/16" (8)
870CSA	870CGSA	870C	870CG	2-1/2"	9" (229)	4-1/4" (108)	9/16" (14)
870CSA	870CGSA	870C	870CG	3"	9" (229)	4-1/4" (108)	9/16" (14)
970CSA	970CGSA	970C	970CG	3-1/2"	11" (279)	5-1/4" (133)	9/16" (14)
970CSA	970CGSA	970C	970CG	4"	11" (279)	5-1/4" (133)	9/16" (14)


* For covers with integral gasket, add 1/8" (3) to height.

DIMENSIONS

Stamped Covers

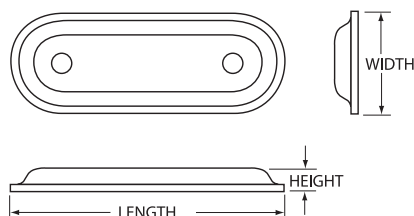


Cast Covers

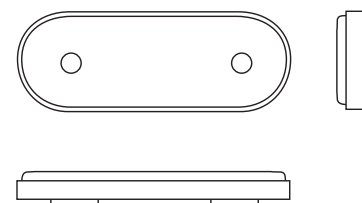



GASKETS

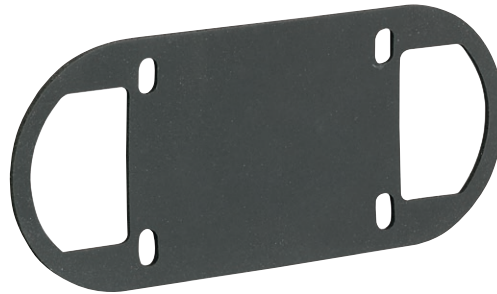


Cover Gaskets

Material

- Open cell neoprene

COVER GASKETS (OPEN CELL NEOPRENE)				
CATALOG NUMBER	HUB SIZE	DIMENSIONS		
		LENGTH	WIDTH	HEIGHT
GASK571	1/2"	3-11/16" (94)	1-3/8" (35)	1/8" (3)
GASK572	3/4"	4-1/4" (108)	1-1/2" (38)	1/8" (3)
GASK573	1"	5" (127)	1-3/4" (44)	1/8" (3)
GASK574	1-1/4"	5-1/2" (140)	2-3/16" (56)	1/8" (3)
GASK575	1-1/2"	6" (152)	2-7/16" (62)	1/8" (3)
GASK576	2"	7" (178)	3" (76)	1/8" (3)
GASK578	2-1/2"	9" (229)	4-1/4" (108)	1/8" (3)
GASK578	3"	9" (229)	4-1/4" (108)	1/8" (3)
GASK579	3-1/2"	11" (279)	5-1/4" (133)	1/8" (3)
GASK579	4"	11" (279)	5-1/4" (133)	1/8" (3)

DIMENSIONS

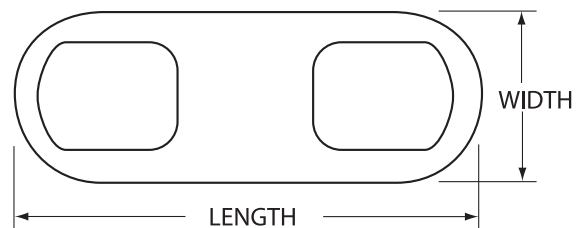



K-PAK SHELF CARTONS

K-PAK®



FEATURES-SPECIFICATIONS

K-PAK® packaging enables Killark distributors to feature fast-moving products in counter display areas.

The uniformly sized (width and height are consistent) cartons allow items to be merchandised on a typical 48" w x 54" H x 18" gondola unit (not supplied by Killark).

Features

- Cartons are suitable for counter merchandising display and/or warehouse storage.
- Open-top bin box displays products for easy customer self-service.
- All cartons are bar coded for easy electronic identification.
- Conduit bodies are packaged with appropriate covers and gaskets.
- Intact shrink-wrap packaging allows for clean install every time

K-PAK Carton Dimensions (Aluminum)

- Full depth cartons:
 - » 6" W x 8½" H x 15" D
- Half depth cartons:
 - » 6" W x 8½" H x 7½" D
- Display face (width & height) same for all cartons.

Additional Information:

- K-packing available in both Duraloy® 5 and 7 Malleable, but carton sizes will vary



K-PAK SHELF CARTONS

O FITTINGS		
CATALOG NUMBER	DESCRIPTION	PKG QTY.
OC-1CG	1/2" C w/cover & gasket	40
OC-2CG	3/4" C w/cover & gasket	25
OC-3CG	1" C w/cover & gasket	20
OC-4CG	1-1/4" C w/cover & gasket	8
OC-5CG	1-1/2" C w/cover & gasket	8
OC-6CG	2" C w/cover & gasket	3
OLB-1CG	1/2" LB w/cover & gasket	40
OLB-2CG	3/4" LB w/cover & gasket	25
OLB-3CG	1" LB w/cover & gasket	15
OLB-4CG	1-1/4" LB w/cover & gasket	8
OLB-5CG	1-1/2" LB w/cover & gasket	5
OLB-6CG	2" LB w/cover & gasket	3
OLB-7CG	2-1/2" LB w/cover & gasket	1
OLB-8CG	3" LB w/cover & gasket	1
OLB-9CG	3-1/2" LB w/cover & gasket	1
OLB-0CG	4" LB w/cover & gasket	1
OLL-1CG	1/2" LL w/cover & gasket	40
OLL-2CG	3/4" LL w/cover & gasket	25
OLL-3CG	1" LL w/cover & gasket	15
OLL-4CG	1-1/4" LL w/cover & gasket	8
OLL-5CG	1-1/2" LL w/cover & gasket	8
OLL-6CG	2" LL w/cover & gasket	3
OLR-1CG	1/2" LR w/cover & gasket	40
OLR-2CG	3/4" LR w/cover & gasket	25
OLR-3CG	1" LR w/cover & gasket	15
OLR-4CG	1-1/4" LR w/cover & gasket	8
OLR-5CG	1-1/2" LR w/cover & gasket	8
OLR-6CG	2" LR w/cover & gasket	3
OT-1CG	1/2" T w/cover & gasket	30
OT-2CG	3/4" T w/cover & gasket	25
OT-3CG	1" T w/cover & gasket	15
OT-4CG	1-1/4" T w/cover & gasket	8
OT-5CG	1-1/2" T w/cover & gasket	8
OT-6CG	2" T w/cover & gasket	2

SLB FITTINGS		
CATALOG NUMBER	DESCRIPTION	PKG QTY.
SLB-1-CP	1/2" Service entrance LB	50
SLB-2-CP	3/4" Service entrance LB	25
SLB-3-CP	1" Service entrance LB	25

CO FITTINGS*		
CATALOG NUMBER	DESCRIPTION	PKG QTY.
COC-1CG	1/2" C w/cover & gasket	10
COC-2CG	3/4" C w/cover & gasket	10
COC-3CG	1" C w/cover & gasket	5
COLB-1CG	1/2" LB w/cover & gasket	10
COLB-2CG	3/4" LB w/cover & gasket	10
COLB-3CG	1" LB w/cover & gasket	5
COLL-1CG	1" L w/cover & gasket	10
COLL-2CG	2" L w/cover & gasket	10
COLL-3CG	3" L w/cover & gasket	5
COLR-1CG	1/2" LR w/cover & gasket	10
COLR-2CG	3/4" LR w/cover & gasket	10
COLR-3CG	1" LR w/cover & gasket	5
COT-1CG	1/2" LR w/cover & gasket	10
COT-2CG	3/4" LR w/cover & gasket	10
COT-3CG	1" LR w/cover & gasket	5

FS/FD BACK BOXES/COVERS		
CATALOG NUMBER	DESCRIPTION	PKG QTY.
1FA-CP	Duplex cover	50
1FT-CP	Toggle cover	50
FCLA-CP	Duplex cover	25
FDC-1-CP	1/2" FDC box	10
FDC-2-CP	3/4" FDC box	10
FD-1-CP	1/2" FD box	10
FD-2-CP	3/4" FD box	10
FSBC-CP	Blank cover	50
FSC-1-CP	1/2" FSC box	15
FSC-2-CP	3/4" FSC box	15
FST-CP	Cover	25
FS-1-CP	1/2" FS box	20
FS-2-CP	3/4" FS box	20

WH WEATHERPROOF HUBS		
CATALOG NUMBER	DESCRIPTION	PKG QTY.
WH-1	1/2" Conduit hub	25
WH-2	3/4" Conduit hub	25
WH-3	1" Conduit hub	25



FITTINGS

DURALOY® 8 SERIES

IRON CONDUIT BODIES

DURALOY® 8



Suitable for wet locations when used with gasketed covers.

Federal Specification
W-C-586D/A-A 50563.

Suitable for use in hazardous location applications when installed according to NEC Articles 501.10(b), Class I, Div. 2, (Suitable for use in Class I Zone 2 applications) 502.10 and 503.10.

UL LISTED E3397

CSA Certified LR11852

FEATURES-SPECIFICATIONS

Features

- Completely interchangeable with competitive bodies, gaskets, and covers
- Flat back design provides greater cubic capacity for easier wire pulling and more room for splicing
- Raintight when used with gasketed covers
- Stainless steel screws on stamped and cast covers
- Smooth integral wire bushings
- Larger volume than Duraloy® 5 and 7 for bigger space for maintenance
- Add PP to end of catalog logic for cover and gasket packaging.

Materials

Duraloy Gray Iron Alloy

- Duraloy malleable gray iron
 - » Tri-coat finish of electro-zinc and chromate sealant with electrostatically applied Duraloy Plus powder coat paint




IRON CONDUIT BODIES



C Type

C TYPE CONDUIT BODY*									
CATALOG NUMBER	HUB SIZE	DIMENSIONS							VOLUME CU. IN.
		A	B	C	D	E	F	G	
C18	1/2"	5-5/16" (135)	1-15/32" (37)	1-15/32" (37)	1" (25)	3-9/32" (83)	—	5/8" (16)	5.0
C28	3/4"	6-9/16" (167)	1-11/16" (43)	1-21/32" (42)	1-3/16" (30)	3-15/16" (100)	—	3/4" (19)	8.0
C38	1"	7-9/16" (192)	1-31/32" (50)	1-27/32" (47)	1-3/8" (35)	4-17/32" (115)	—	7/8" (22)	12.25
C448	1-1/4"	8-7/16" (214)	2-3/8" (60)	2-5/32" (55)	1-3/4" (44)	5-15/16" (151)	—	1-3/32" (28)	23.25
C58	1-1/2"	10-3/8" (264)	2-25/32" (71)	2-25/32" (71)	2-3/32" (53)	6-1/2" (165)	—	1-3/8" (35)	42.50
C68	2"	12-3/8" (314)	3-9/16" (90)	3-27/32" (98)	3" (76)	8-5/8" (219)	—	1-7/8" (48)	105.00
C78	2-1/2"	15-5/8" (397)	4-7/16" (113)	5" (127)	4-1/4" (108)	10-7/8" (276)	—	2-1/2" (64)	200.00
C88	3"	15-5/8" (397)	4-13/16" (122)	5" (127)	4-1/4" (108)	10-7/8" (276)	—	2-1/2" (64)	217.00

DIMENSIONS

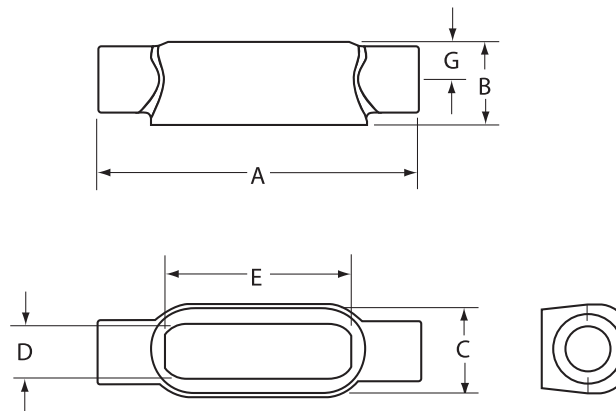

C Type



FITTINGS

DURALOY® 8 SERIES

IRON CONDUIT BODIES



LB Type



LL Type



LB TYPE CONDUIT BODY*

CATALOG NUMBER	HUB SIZE	DIMENSIONS							VOLUME CU. IN.
		A	B	C	D	E	F	G	
LB18	1/2"	5-3/32" (129)	2-9/32" (58)	1-15/32" (37)	1" (25)	3-9/32" (83)	4-3/8" (111)	5/8" (16)	5.0
LB28	3/4"	5-3/4" (146)	2-1/2" (64)	1-21/32" (42)	1-3/16" (30)	3-15/16" (100)	4-29/32" (125)	3/4" (19)	8.0
LB38	1"	6-5/8" (168)	2-29/32" (74)	1-27/32" (47)	1-3/8" (35)	4-17/32" (115)	5-23/32" (145)	7/8" (22)	13.0
LB448	1-1/4"	7-1/2" (191)	3-5/16" (84)	2-5/32" (55)	1-3/4" (44)	5-15/16" (151)	6-13/32" (163)	1-3/32" (28)	24.0
LB58	1-1/2"	9-1/8" (232)	4-1/32" (102)	4-25/32" (121)	2-3/32" (53)	6-1/2" (165)	7-3/4" (197)	1-3/8" (35)	42.0
LB68	2"	11-1/8" (283)	4-13/16" (122)	4-13/16" (122)	3" (76)	8-5/8" (219)	9-3/16" (233)	1-7/8" (48)	105.0
LB78	2-1/2"	13-15/16" (354)	6-1/8" (156)	6-1/8" (156)	4-1/4" (108)	10-7/8" (276)	11-7/16" (291)	2-1/2" (64)	200.0
LB888	3"	13-15/16" (354)	6-1/2" (165)	6-1/2" (165)	4-1/4" (108)	10-7/8" (276)	11-7/16" (291)	2-1/2" (64)	217.0
LB98	3-1/2"	16-7/8" (429)	7-9/16" (192)	7-9/16" (192)	5-7/16" (138)	13-7/8" (352)	13-3/4" (349)	3-1/8" (79)	380.0
LB108	4"	16-7/8" (429)	7-13/16" (198)	7-13/16" (198)	5-7/16" (138)	13-7/8" (352)	13-3/4" (349)	3-1/8" (79)	400.0



LL TYPE CONDUIT BODY*

CATALOG NUMBER	HUB SIZE	DIMENSIONS							VOLUME CU. IN.
		A	B	C	D	E	F	G	
LL18	1/2"	5-3/32" (129)	2-9/32" (56)	1-15/32" (37)	1" (25)	3-9/32" (83)	4-3/8" (111)	5/8" (16)	5.0
LL28	3/4"	5-3/4" (146)	2-1/2" (64)	1-21/32" (42)	1-3/16" (30)	3-15/16" (100)	4-29/32" (125)	3/4" (19)	8.0
LL38	1"	6-5/8" (168)	2-29/32" (74)	1-27/32" (47)	1-3/8" (35)	4-17/32" (115)	5-23/32" (145)	7/8" (22)	13.0
LL448	1-1/4"	7-1/2" (191)	3-5/16" (84)	2-5/32" (55)	1-3/4" (44)	5-15/16" (151)	6-13/32" (163)	1-3/32" (28)	24.0
LL58	1-1/2"	9-1/8" (232)	4-1/32" (102)	4-25/32" (121)	2-3/32" (53)	6-1/2" (165)	7-3/4" (197)	1-3/8" (35)	42.0
LL68	2"	11-1/8" (283)	4-13/16" (122)	4-13/16" (122)	3" (76)	8-5/8" (219)	9-3/16" (233)	1-7/8" (48)	105.0
LL78	2-1/2"	13-15/16" (354)	6-1/8" (156)	6-1/8" (156)	4-1/4" (108)	10-7/8" (276)	11-7/16" (291)	2-1/2" (64)	200.0
LL888	3"	13-15/16" (354)	6-1/2" (165)	6-1/2" (165)	4-1/4" (108)	10-7/8" (276)	11-7/16" (291)	2-1/2" (64)	217.0

DIMENSIONS

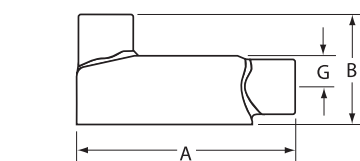

LB Type

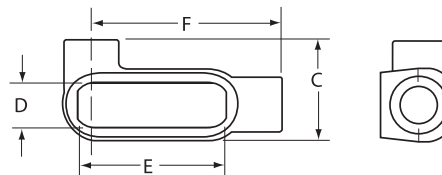


LL Type



IRON CONDUIT BODIES



LR Type

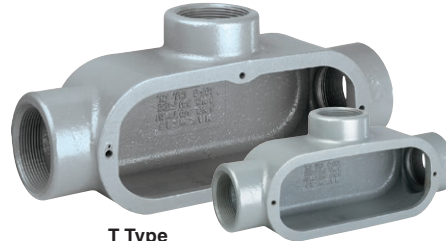

T Type



LR TYPE CONDUIT BODY*

CATALOG NUMBER	HUB SIZE	DIMENSIONS							VOLUME CU. IN.
		A	B	C	D	E	F	G	
LR18	1/2"	5-3/32" (129)	1-15/16" (49)	2-9/32" (58)	1" (52)	3-9/32" (83)	4-3/8" (111)	5/8" (16)	5.0
LR28	3/4"	5-3/4" (146)	1-11/16" (43)	2-1/2" (64)	1-3/16" (30)	3-15/16" (84)	4-29/32" (125)	3/4" (19)	8.0
LR38	1"	6-5/8" (168)	1-31/32" (50)	2-29/32" (74)	1-3/8" (35)	4-17/32" (115)	5-23/32" (145)	7/8" (22)	13.0
LR448	1-1/4"	7-1/2" (191)	2-3/8" (60)	3-5/16" (84)	1-3/4" (44)	5-15/16" (151)	6-13/32" (163)	1-3/32" (28)	24.0
LR58	1-1/2"	9-1/8" (232)	2-25/32" (71)	4-1/32" (102)	2-3/32" (53)	6-1/2" (165)	7-3/4" (199)	1-3/8" (35)	42.0
LR68	2"	11-1/8" (283)	3-9/16" (90)	4-13/16" (122)	3" (76)	8-5/8" (219)	9-3/16" (233)	1-7/8" (48)	105.0
LR78	2-1/2"	13-15/16" (354)	4-7/16" (113)	6-1/8" (156)	4-1/4" (108)	10-7/8" (276)	11-7/16" (291)	2-1/2" (64)	200.0
LR888	3"	13-15/16" (354)	4-13/16" (122)	6-1/2" (165)	4-1/4" (108)	10-7/8" (276)	11-7/16" (291)	2-1/2" (64)	217.0

T TYPE CONDUIT BODY*

CATALOG NUMBER	HUB SIZE	DIMENSIONS							VOLUME CU. IN.
		A	B	C	D	E	F	G	
T18	1/2"	5-15/16" (151)	1-25/32" (45)	2-5/16" (59)	1" (25)	3-9/32" (83)	—	5/8" (16)	6.0
T28	3/4"	6-9/16" (167)	2" (51)	2-1/2" (64)	1-3/16" (30)	3-15/16" (100)	—	3/4" (19)	10.0
T38	1"	7-9/16" (192)	2-9/32" (58)	2-25/32" (71)	1-3/8" (35)	4-17/32" (115)	—	7/8" (22)	15.0
T448	1-1/4"	8-7/16" (214)	2-5/8" (67)	3-1/8" (79)	1-3/4" (44)	5-5/16" (135)	—	1-3/32" (28)	25.0
T58	1-1/2"	10-3/8" (264)	2-25/32" (71)	4-1/32" (102)	2-3/32" (53)	6-1/2" (165)	—	1-3/8" (35)	44.0
T68	2"	12-3/8" (314)	3-9/16" (90)	5-1/8" (130)	3" (76)	8-5/8" (219)	—	1-7/8" (48)	105.0
T78	2-1/2"	15-5/8" (397)	4-7/16" (113)	6-11/16" (170)	4-1/4" (108)	10-11/16" (271)	—	2-1/2" (64)	200.0
T88	3"	15-5/8" (397)	4-13/16" (122)	6-11/16" (170)	4-1/4" (108)	10-11/16" (271)	—	2-1/2" (64)	217.0

DIMENSIONS

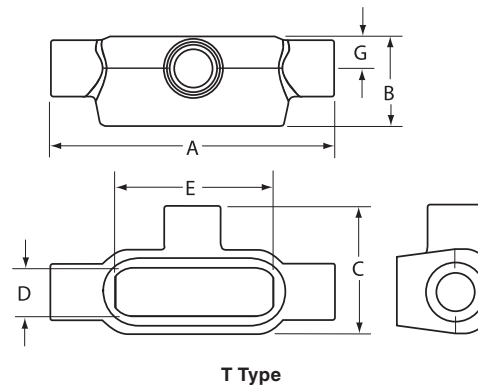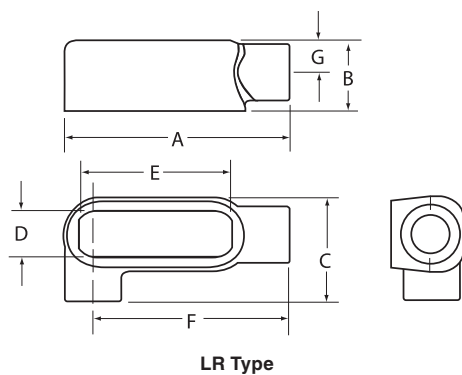



FITTINGS

DURALOY® 8 SERIES

IRON CONDUIT BODIES



TB Type



X Type


TB TYPE CONDUIT BODY*

CATALOG NUMBER	HUB SIZE	DIMENSIONS							VOLUME CU. IN.
		A	B	C	D	E	F	G	
TB18	1/2"	5-15/16" (151)	2-15/16" (75)	1-15/16" (49)	1" (25)	3-9/32" (83)	—	5/8" (16)	6.0
TB28	3/4"	6-9/16" (167)	2-1/2" (64)	1-21/32" (42)	1-3/16" (30)	3-15/16" (100)	—	3/4" (19)	10.0
TB38	1"	7-9/16" (192)	2-25/32" (71)	1-27/32" (47)	1-3/8" (35)	4-17/32" (115)	—	7/8" (22)	15.0
TB448	1-1/4"	8-7/16" (214)	3-1/8" (79)	2-3/16" (55)	1-3/4" (44)	5-5/16" (135)	—	1-3/32" (26)	25.0
TB58	1-1/2"	10-3/8" (264)	4-1/32" (102)	2-25/32" (71)	2-3/32" (53)	6-1/2" (165)	—	1-3/8" (35)	44.0
TB68	2"	12-3/8" (314)	5-1/8" (130)	3-7/8" (98)	3" (76)	8-5/8" (219)	—	1-7/8" (48)	105.0

X TYPE CONDUIT BODY*

CATALOG NUMBER	HUB SIZE	DIMENSIONS							VOLUME CU. IN.
		A	B	C	D	E	F	G	
X18	1/2"	5-15/16" (151)	1-25/32" (45)	3-1/8" (79)	1" (25)	3-9/32" (83)	—	5/8" (16)	6.0
X28	3/4"	6-9/16" (167)	2" (51)	3-15/16" (100)	1-3/16" (30)	3-15/16" (100)	—	3/4" (19)	10.0
X38	1"	7-9/16" (192)	2-9/32" (58)	3-23/32" (94)	1-3/8" (35)	4-17/32" (115)	—	7/8" (22)	15.0
X448	1-1/4"	8-7/16" (214)	2-5/8" (67)	4-1/16" (103)	1-3/4" (44)	5-5/16" (135)	—	1-3/32" (26)	25.0
X58	1-1/2"	10-3/8" (264)	2-25/32" (71)	5-9/32" (134)	2-3/32" (53)	6-1/2" (165)	—	1-3/8" (35)	44.0
X68	2"	12-3/8" (314)	3-9/16" (90)	6-3/8" (162)	3" (76)	8-5/8" (219)	—	1-7/8" (48)	105.0

DIMENSIONS

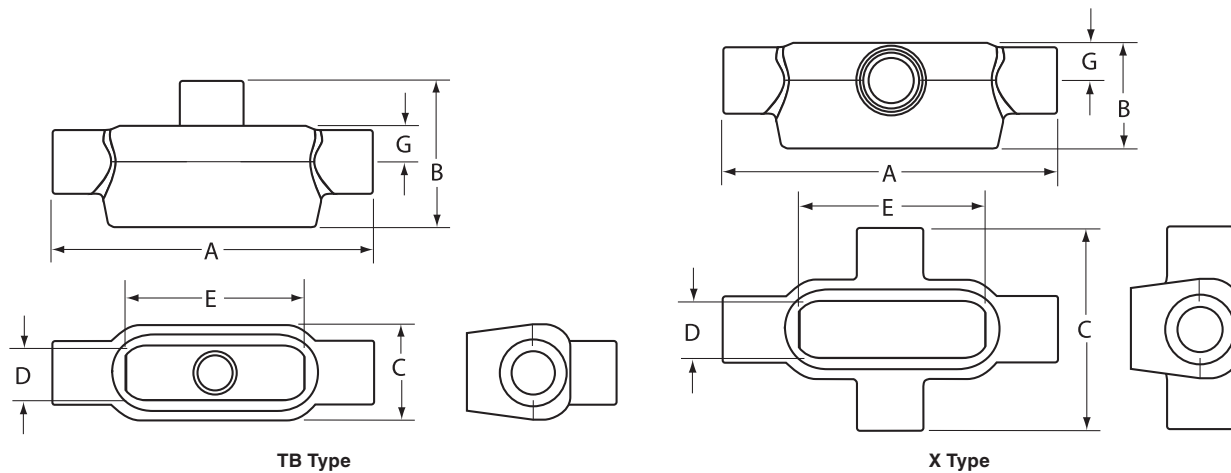

TB Type

X Type



IRON COVERS AND GASKETS



Cast Covers



Cover Gaskets (Neoprene)



Stamped Steel Covers

Cast Material/Finish

Duraloy Gray Iron Alloy

- Tri-coat finish of electrozinc, chromate sealant, and electrostatically applied powder coating
- 300 Series stainless steel screws

Galvanized Steel

- Natural finish
- 300 Series stainless steel screws

Material/Finish

- Neoprene. Compression molded.

CAST IRON COVERS

CATALOG NUMBER	HUB SIZE	OVERALL DIMENSIONS		
		LENGTH	WIDTH	HEIGHT
180F	1/2"	4-7/32"(107)	1-15/32"(37)	3/8"(10)
280F	3/4"	4-13/16"(122)	1-21/32"(42)	3/8"(10)
380F	1"	5-19/32"(142)	1-27/32"(47)	5/8"(16)
480F	1-1/4"	6-9/16"(167)	2-3/16"(56)	5/8"(16)
580F	1-1/2"	7-7/8"(200)	2-25/32"(71)	5/8"(16)
680F	2"	9-3/4"(248)	3-7/8"(98)	5/8"(16)
880F	2-1/2"	12-1/4"(311)	5"(127)	5/8"(16)
880F	3"	12-1/4"(311)	5"(127)	5/8"(16)
980F	3-1/2"	15"(381)	6-1/4"(159)	5/8"(16)
980F	4"	15"(381)	6-1/4"(159)	5/8"(16)

STAMPED STEEL COVERS

CATALOG NUMBER	HUB SIZE	OVERALL DIMENSIONS		
		LENGTH	WIDTH	HEIGHT
180S	1/2"	4-7/32"(107)	1-15/32"(37)	5/16"(8)
280S	3/4"	4-13/16"(122)	1-21/32"(42)	5/16"(8)
380S	1"	5-19/32"(142)	1-27/32"(47)	5/16"(8)
480S	1-1/4"	6-9/16"(167)	2-3/16"(56)	5/16"(8)
580S	1-1/2"	7-7/8"(200)	2-25/32"(71)	5/16"(8)
680S	2"	9-3/4"(248)	3-7/8"(98)	5/16"(8)
880S	2-1/2"	12-1/4"(311)	5"(127)	9/16"(14)
880S	3"	12-1/4"(311)	5"(127)	9/16"(14)
980S	3-1/2"	15"(381)	6-1/4"(159)	9/16"(14)
980S	4"	15"(381)	6-1/4"(159)	9/16"(14)

COVER GASKETS

CATALOG NUMBER	HUB SIZE	OVERALL DIMENSIONS		
		LENGTH	WIDTH	HEIGHT
GASK851N	1/2"	4-7/32"(107)	1-15/32"(37)	1/8"(3)
GASK852N	3/4"	4-13/16"(122)	1-21/32"(42)	1/8"(3)
GASK853N	1"	5-19/32"(142)	1-27/32"(47)	1/8"(3)
GASK854N	1-1/4"	6-9/16"(167)	2-3/16"(56)	1/8"(3)
GASK805N	1-1/2"	7-7/8"(200)	2-25/32"(71)	1/8"(3)
GASK806N	2"	9-3/4"(248)	3-7/8"(98)	1/8"(3)
GASK808N	2-1/2"	12-1/4"(311)	5"(127)	1/8"(3)
GASK808N	3"	12-1/4"(311)	5"(127)	1/8"(3)
GASK809N	3-1/2"	15"(381)	6-1/4"(159)	1/8"(3)
GASK809N	4"	15"(381)	6-1/4"(159)	1/8"(3)

NOTE - (2) screws 1/2" through 1-1/4", (4) screws 1-1/2" through 4"



FITTINGS

CO & TW SERIES

COMBO AND EMT CONDUIT BODIES



UL LISTED E3397

SP Certified LR11852

FEATURES-SPECIFICATIONS

Features

- Combination bodies have threaded and set screw hubs
- Pre-packaged with body, cover, and gasket.
- For use with IMC and EMT conduit
- Covers furnished with stainless steel screws
- Thread types are NPSM
- Type 3 rating with Rigid/IMC Conduit

Materials

- **CONDUIT BODIES** – Die cast, copper-free aluminum (less than 4/10 of 1%) with electrostatically applied powder coating.
- **COVERS** – Stamped Aluminum/Natural Finish
- **GASKETS** – Neoprene



COMBO AND EMT CONDUIT BODIES



C Type - COC-1,2,3



C Type - COC-4,5,6



LB Type - COLB-1,2,3




LB Type - COLB-4,5,6


C TYPE CONDUIT BODY										
	CATALOG NUMBER	HUB SIZE	DIMENSIONS							VOLUME CU. IN.
			A	B	C	D	E	F	G	
C O M B O	COC-1CG	1/2"	5-3/8" (137)	1-3/8" (35)	1-3/8" (35)	1" (25)	3-5/32" (80)	—	5/8" (16)	4.0
	COC-2CG	3/4"	6-1/8" (156)	1-5/8" (41)	1-5/8" (67)	1-7/32" (31)	3-25/32" (96)	—	3/4" (19)	7.0
	COC-3CG	1"	7-1/8" (181)	2" (51)	1-7/8" (48)	1-15/32" (37)	4-17/32" (115)	—	15/16" (24)	12.0
	COC-4CG	1-1/4"	9-1/8" (232)	2-5/8" (67)	2-5/8" (67)	2" (51)	6" (152)	—	1-3/16" (30)	32.0
	COC-5CG	1-1/2"	9-1/4" (235)	2-3/4" (70)	2-5/8" (67)	2" (51)	6" (152)	—	1-3/8" (32)	36.0
	COC-6CG	2"	11-7/8" (302)	3-1/2" (89)	3-1/8" (79)	2-9/16" (65)	8-1/16" (205)	—	1-5/8" (38)	70.0
E M T	TWOC-7CG	2-1/2"	15-1/8" (384)	4" (102)	4-3/8" (111)	3-11/16" (94)	10-5/8" (270)	—	1-13/16" (54)	153.0
	TWOC-8CG	3"	15-1/8" (384)	4-3/4" (121)	4-3/8" (111)	3-11/16" (94)	10-5/8" (270)	—	2-3/16" (54)	181.0
	TWOC-9CG	3-1/2"	18-3/8" (467)	5-1/2" (140)	5-1/2" (140)	4-7/8" (124)	13-1/8" (333)	—	2-1/2" (67)	290.0
	TWOC-0CG	4"	18-3/8" (467)	5-5/8" (143)	5-1/2" (140)	4-7/8" (124)	13-1/8" (333)	—	2-3/4" (67)	320.0

LB TYPE CONDUIT BODY										
	CATALOG NUMBER	HUB SIZE	DIMENSIONS							VOLUME CU. IN.
			A	B	C	D	E	F	G	
C O M B O	COLB-1CG	1/2"	4-17/32" (115)	2-9/32" (83)	1-3/8" (35)	1" (25)	3-5/32" (80)	4-3/8" (111)	5/8" (16)	4.0
	COLB-2CG	3/4"	5-3/4" (146)	2-1/2" (64)	1-5/8" (41)	1-7/32" (31)	3-25/32" (96)	4-29/32" (125)	3/4" (19)	7.0
	COLB-3CG	1"	6-5/8" (168)	2-29/32" (74)	1-7/8" (48)	1-15/32" (37)	4-17/32" (115)	5-23/32" (145)	15/16" (24)	12.0
	COLB-4CG	1-1/4"	7-1/2" (191)	3-3/16" (81)	2-5/8" (67)	2" (51)	6" (152)	6-13/32" (162)	1-3/16" (30)	28.8
	COLB-5CG	1-1/2"	9-1/8" (232)	4" (102)	2-5/8" (67)	2" (51)	6" (152)	17-3/4" (451)	1-3/8" (32)	36.0
	COLB-6CG	2"	10" (254)	4-13/16" (122)	3-1/8" (79)	2-9/16" (65)	8-1/16" (205)	8-5/32" (207)	1-5/8" (38)	70.0
E M T	TWOLB-7CG	2-1/2"	13-15/16" (354)	6-1/8" (156)	4-3/8" (111)	3-11/16" (94)	10-5/8" (270)	11-7/16" (291)	2-1/2" (64)	142.0
	TWOLB-8CG	3"	13-15/16" (354)	6-1/2" (165)	4-3/8" (111)	3-11/16" (94)	10-5/8" (270)	11-7/16" (291)	2-3/16" (54)	173.0
	TWOLB-9CG	3-1/2"	16-7/8" (429)	7-9/16" (192)	5-1/2" (140)	4-7/8" (124)	13-1/8" (333)	13-3/4" (349)	2-1/2" (67)	292.0
	TWOLB-0CG	4"	16-7/8" (429)	7-13/16" (198)	5-1/2" (140)	4-7/8" (124)	13-1/8" (333)	13-3/4" (349)	2-3/4" (70)	324.0

DIMENSIONS

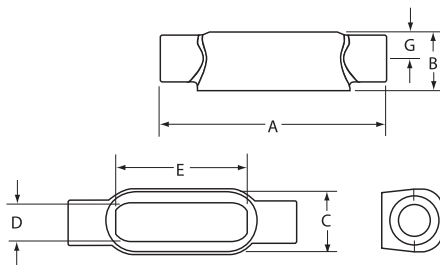

C Type

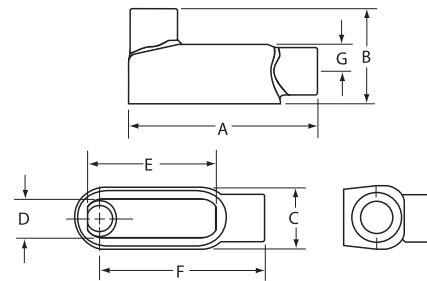

LB Type



FITTINGS

CO & TW SERIES

COMBO AND EMT CONDUIT BODIES




LL Type - COL-1,2,3



LL Type - COL-4,5,6



LR Type - COLR-1,2,3



LR Type - COLR-4,5,6


LL TYPE CONDUIT BODY

	CATALOG NUMBER	HUB SIZE	DIMENSIONS							VOLUME CU. IN.
			A	B	C	D	E	F	G	
C O M B O	COLL-1CG	1/2"	4-5/8" (117)	1-3/8" (35)	2" (51)	1" (25)	3-5/32" (80)	—	5/8" (16)	4.0
	COLL-2CG	3/4"	5-3/8" (137)	1-5/8" (41)	2-3/16" (56)	1-7/32" (31)	3-25/32" (96)	—	3/4" (19)	7.0
	COLL-3CG	1"	6-1/4" (159)	2" (51)	2-9/16" (65)	1-15/32" (37)	4-17/32" (115)	—	15/16" (24)	12.0
	COLL-4CG	1-1/4"	8-1/8" (206)	2-5/8" (67)	3-1/2" (89)	2" (51)	6" (152)	—	1-3/16" (30)	32.0
	COLL-5CG	1-1/2"	8-1/8" (206)	2-3/4" (70)	3-1/2" (89)	2" (51)	6" (152)	—	1-3/8" (32)	31.0
	COLL-6CG	2"	10-9/16" (268)	3-1/2" (89)	4-3/16" (106)	2-9/16" (65)	8-1/16" (205)	—	1-5/8" (38)	70.0
E M T	TWOLL-7CG	2-1/2"	13-11/16" (348)	4" (102)	5-3/4" (146)	3-11/16" (94)	10-5/8" (270)	—	1-13/16" (46)	142.0
	TWOLL-8CG	3"	13-11/16" (348)	4-3/4" (121)	5-3/4" (146)	3-11/16" (94)	10-5/8" (270)	—	2-3/16" (54)	173.0
	TWOLL-9CG	3-1/2"	16-1/2" (419)	5-1/2" (140)	7-1/8" (181)	4-7/8" (124)	13-1/8" (333)	—	2-1/2" (67)	292.0
	TWOLL-0CG	4"	16-1/2" (419)	5-5/8" (143)	7-1/8" (181)	4-7/8" (124)	13-1/8" (333)	—	2-3/4" (67)	324.0


LR TYPE CONDUIT BODY

	CATALOG NUMBER	HUB SIZE	DIMENSIONS							VOLUME CU. IN.
			A	B	C	D	E	F	G	
C O M B O	COLR-1CG	1/2"	4-5/8" (117)	1-3/8" (35)	2" (35)	1" (25)	3-5/32" (80)	4-3/8" (111)	5/8" (16)	4.0
	COLR-2CG	3/4"	5-3/8" (137)	1-5/8" (41)	2-3/16" (67)	1-7/32" (31)	3-25/32" (96)	4-29/32" (125)	3/4" (19)	7.0
	COLR-3CG	1"	6-1/4" (159)	2" (51)	2-9/16" (65)	1-15/32" (37)	4-17/32" (115)	5-23/32" (145)	15/16" (24)	12.0
	COLR-4CG	1-1/4"	8-1/8" (206)	2-5/8" (67)	3-1/2" (89)	2" (51)	6" (152)	6-13/32" (162)	1-3/16" (30)	32.0
	COLR-5CG	1-1/2"	8-1/8" (206)	2-3/4" (70)	3-1/2" (89)	2" (51)	6" (152)	17-3/4" (451)	1-3/8" (32)	31.0
	COLR-6CG	2"	10-9/16" (268)	3-1/2" (89)	4-3/16" (106)	2-9/16" (65)	8-1/16" (205)	9-5/32" (233)	1-5/8" (38)	70.0
E M T	TWOLR-7CG	2-1/2"	13-11/16" (348)	4" (102)	5-3/4" (146)	3-11/16" (93)	10-5/8" (270)	11-7/16" (291)	1-13/16" (54)	142.0
	TWOLR-8CG	3"	13-11/16" (348)	4-3/4" (121)	5-3/4" (146)	3-11/16" (93)	10-5/8" (270)	11-7/16" (291)	2-3/16" (54)	173.0
	TWOLR-9CG	3-1/2"	16-1/2" (419)	5-1/2" (140)	7-1/8" (181)	4-7/8" (124)	13-1/8" (333)	13-3/4" (349)	2-1/2" (67)	292.0
	TWOLR-0CG	4"	16-1/2" (419)	5-5/8" (143)	7-1/8" (181)	4-7/8" (124)	13-1/8" (333)	13-3/4" (349)	2-3/4" (67)	324.0

DIMENSIONS

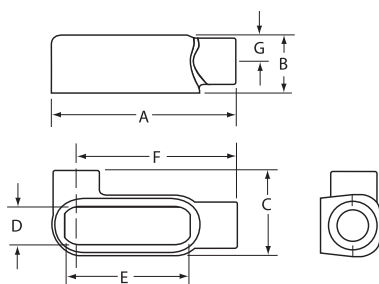

LL Type

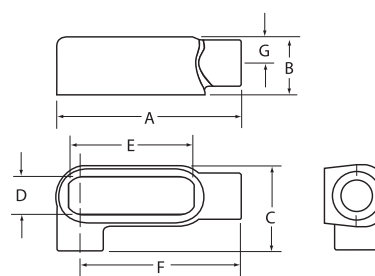

LR Type



COMBO AND EMT CONDUIT BODIES



T Type - COT-1,2,3



T Type - COT-4,5,6



NEOPRENE GASKET




ALUMINUM STAMPED COVER

	T TYPE CONDUIT BODY									
	CATALOG NUMBER	HUB SIZE	DIMENSIONS							VOLUME CU. IN.
			A	B	C	D	E	F	G	
C O M B O	COT-1CG	1/2"	5-3/8" (137)	1-3/8" (35)	2" (35)	1" (25)	3-5/32" (80)	—	5/8" (16)	4.0
	COT-2CG	3/4"	6-1/16" (154)	1-5/8" (41)	2-3/16" (67)	1-7/32" (31)	3-25/32" (96)	—	3/4" (19)	7.0
	COT-3CG	1"	7-1/8" (181)	2" (51)	2-9/16" (65)	1-15/32" (37)	4-17/32" (115)	—	15/16" (24)	12.0
	COT-4CG	1-1/4"	9-3/16" (233)	2-5/8" (67)	3-1/2" (89)	2" (51)	6" (152)	—	1-3/16" (30)	32.0
	COT-5CG	1-1/2"	9-3/16" (233)	2-3/4" (70)	3-1/2" (89)	2" (51)	6" (152)	—	1-3/8" (32)	33.0
	COT-6CG	2"	11-5/8" (295)	3-1/2" (89)	4-3/16" (106)	2-9/16" (65)	8-1/16" (205)	—	1-5/8" (38)	70.0
E M T	TWOT-7CG	2-1/2"	15-1/8" (384)	4" (102)	5-3/4" (146)	3-11/16" (94)	10-5/8" (270)	—	1-13/16" (54)	142.0
	TWOT-8CG	3"	15-1/8" (384)	4-3/4" (121)	5-3/4" (146)	3-11/16" (94)	10-5/8" (270)	—	2-3/16" (54)	173.0
	TWOT-9CG	3-1/2"	18-1/8" (460)	5-1/2" (140)	7-1/8" (181)	4-7/8" (124)	13-1/8" (333)	—	2-1/2" (67)	292.0
	TWOT-0CG	4"	18-1/8" (460)	5-5/8" (143)	7-1/8" (181)	4-7/8" (124)	13-1/8" (333)	—	2-3/4" (67)	324.0

NEOPRENE REPLACEMENT GASKETS	
CATALOG NUMBER	HUB SIZE
OLK-1RG	1/2"
OLK-2RG	3/4"
OLK-3RG	1"
OL-45-RG	1-1/4"
OL-45-RG	1-1/2"
OL-6-RG	2"
OL-78-RG	2-1/2"
OL-78-RG	3"
OL-90-RG	3-1/2"
OL-90-RG	4"

ALUMINUM REPLACEMENT COVERS				
CATALOG NUMBER	HUB SIZE	DIMENSIONS		
		LENGTH	WIDTH	HEIGHT
OL-10	1/2"	3-15/16" (100)	1-3/8" (35)	3/8" (10)
OL-20	3/4"	4-5/8" (117)	1-5/8" (41)	3/8" (10)
OL-30	1"	5-3/8" (137)	1-7/8" (48)	5/8" (16)
OL-450	1-1/4"	7-3/16" (183)	2-5/8" (67)	5/8" (16)
OL-450	1-1/2"	7-3/16" (183)	2-5/8" (67)	5/8" (16)
OL-60	2"	9-1/2" (241)	3-1/8" (79)	5/8" (16)
OL-780	2-1/2"	12-1/4" (311)	4-3/8" (111)	5/8" (16)
OL-780	3"	12-1/4" (311)	4-3/8" (111)	5/8" (16)
OL-900	3-1/2"	14-7/8" (378)	5-1/2" (140)	5/8" (16)
OL-900	4"	14-7/8" (378)	5-1/2" (140)	5/8" (16)

DIMENSIONS

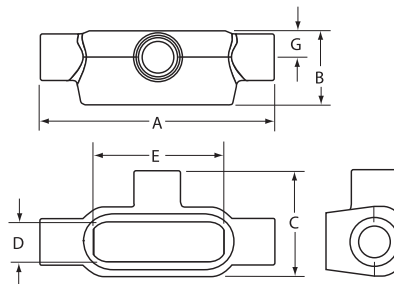

T Type



FITTINGS

KD ORDINARY DRAIN



UL E22698

FEATURES-SPECIFICATIONS


Features

- Killark's KD series ordinary location drains are used to help alleviate condensation built up in conduit systems. Its stainless steel screen allows for some degree of ventilation to prevent moisture from accumulating.


Materials

- **BODY – NUT:** Steel or copper free aluminum
- **SCREEN:** Stainless steel


CATALOG NUMBER		
ENTRY SIZE	ZINC PLATED STEEL	ALUMINUM
1/2"	KD1	KD1SA
3/4"	KD2	KD2SA

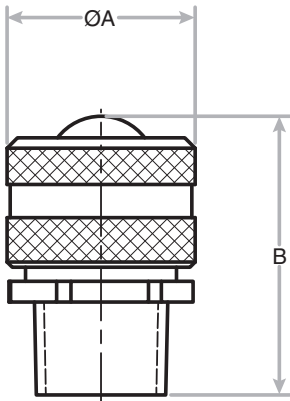

Aluminum

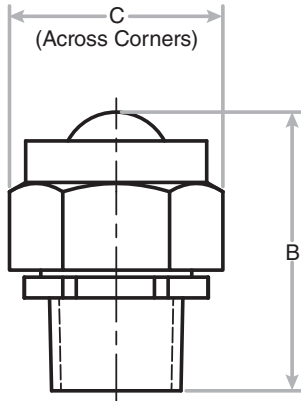

Steel

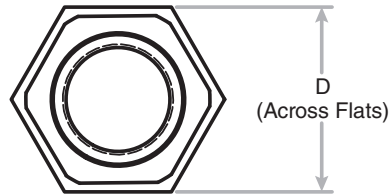


	A	B	C	D	NPT
KD1SA	1.13	1.7	N/A	N/A	1/2"
KD2SA	1.13	1.7	N/A	N/A	3/4"
KD1	N/A	1.7	1.29	1.11	1/2"
KD2	N/A	1.7	1.29	1.11	3/4"



WHY STAINLESS?

Stainless steel has become the metal of choice for superior corrosion resistant conduit systems. Its high strength, heat resistance, and long-lasting life makes it ideal for even the harshest applications. One of the most unique aspect of stainless is its ability to self-heal; When scratched, chromium inside the steel, along with oxygen, will act as a healing agent adding an additional layer of corrosion protection. Stainless steel is perfect for pharmaceutical, wastewater, food and beverage, chemical, and other caustic or hose down applications.

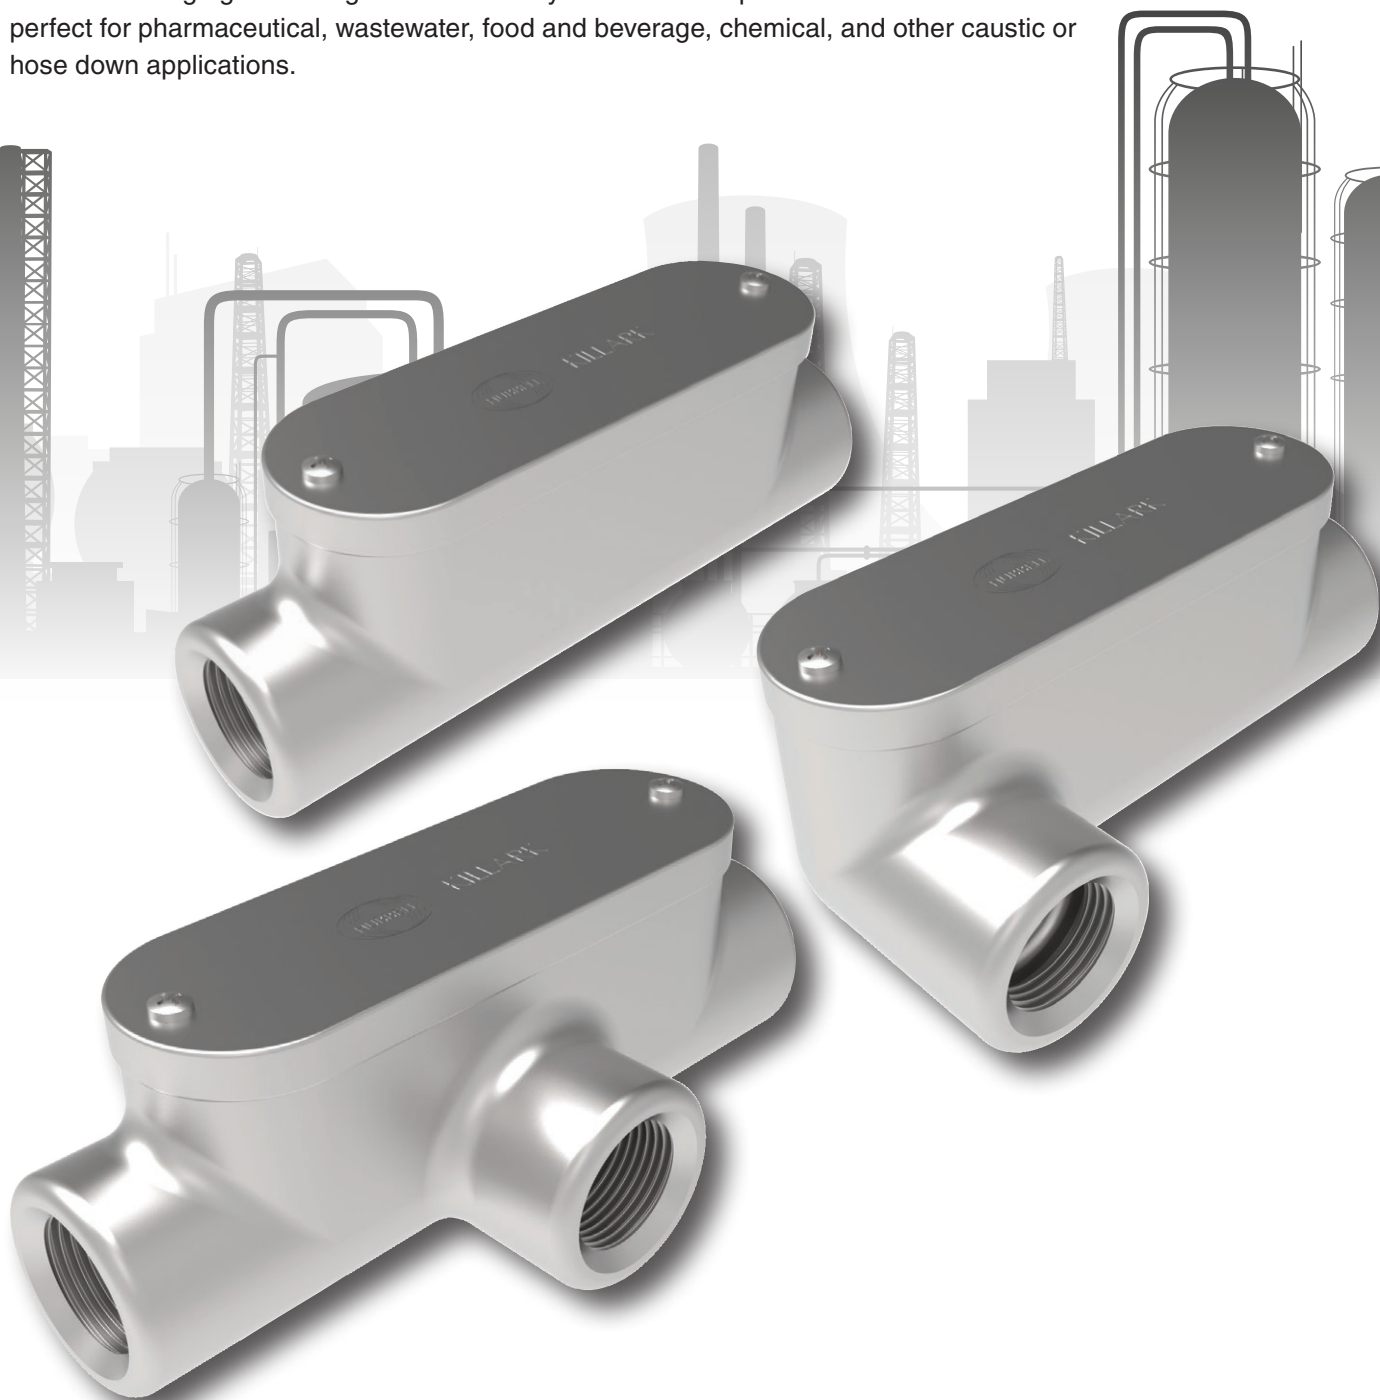



FITTINGS

STAINLESS STEEL CONDUIT BODIES



LB



LR



LL



T



TB



C

UL514B & UL514A compliant

Suitable for use in Class 1 Div. 2 applications when installed in accordance to NEC Article 501.10 Type 4X rated with cover and gasket

 E3397

 E22699

FEATURES-SPECIFICATIONS

Features

- Flat back design provides greater cubic capacity for easier wire pulling and more room for splicing
- Cover and gasket comes standard for Type 4X ratings
- Allows bends in conduit systems
- Cost will recoup overtime due to little to no replacement over the life of the system

Materials




- Body/Cover/Screws - 316 stainless steel
- Gasket – Neoprene
- Natural Finish

FITTINGS




STAINLESS STEEL CONDUIT BODIES






LB CONDUIT TYPE									
CATALOG NUMBER	HUB SIZE	DIMENSIONS						VOLUME	MAX CONDUCTOR FILL
		A	B	C	D	E	F		
LB28SS	3/4"	5.5	2.9	1.5	1.14	3.88	4.75	6.7 IN3	6 AWG MAX 4
LB38SS	1"	6.48	3.04	1.75	1.39	4.86	5.66	11.0 IN3	6 AWG MAX 4
LB58SS	1-1/2"	7.34	3.32	2.44	1.94	3.82	6.28	24.3 IN3	6 AWG MAX 4
LB68SS	2"	8.42	3.86	2.99	2.49	6.8	6.98	44.8 IN3	6 AWG MAX 4

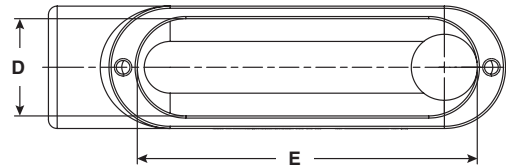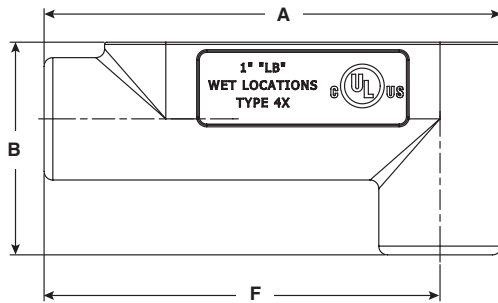

LR CONDUIT TYPE									
CATALOG NUMBER	HUB SIZE	DIMENSIONS						VOLUME	MAX CONDUCTOR FILL
		A	B	C	D	E	F		
LR28SS	3/4"	5.5	2.17	2.49	1.14	3.88	4.75	6.7 IN3	6 AWG MAX 4
LR38SS	1"	6.48	2.31	2.88	1.39	4.86	5.66	11.0 IN3	4 AWG MAX 3
LR58SS	1-1/2"	7.44	2.59	3.56	1.94	5.82	6.28	24.3 IN3	2 AWG MAX 3
LR68SS	2"	8.42	3.13	4.08	2.49	6.8	6.98	44.8 IN3	1 AWG MAX 3

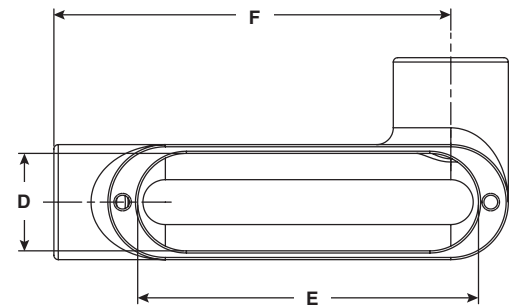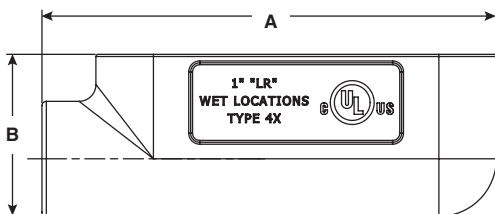

LL CONDUIT TYPE									
CATALOG NUMBER	HUB SIZE	DIMENSIONS						VOLUME	MAX CONDUCTOR FILL
		A	B	C	D	E	F		
LL28SS	3/4"	5.5	2.17	2.48	1.14	3.38	4.75	6.7 IN3	6 AWG MAX 4
LL38SS	1"	6.48	2.31	2.87	1.39	4.86	5.66	11.0 IN3	4 AWG MAX 3
LL58SS	1-1/2"	7.44	2.59	3.55	1.94	5.82	6.28	24.3 IN3	2 AWG MAX 3
LL68SS	2"	8.42	3.13	4.07	2.49	6.8	6.98	44.8 IN3	1 AWG MAX 3

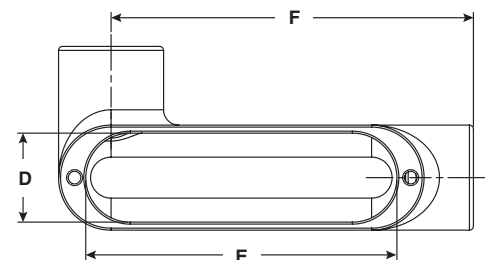

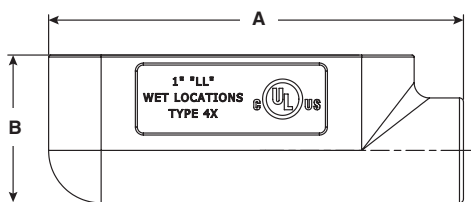







FITTINGS

STAINLESS STEEL CONDUIT BODIES




T CONDUIT TYPE									
CATALOG NUMBER	HUB SIZE	DIMENSIONS						VOLUME	MAX CONDUCTOR FILL
		A	B	C	D	E	F		
T28SS	3/4"	6.23	2.03	2.49	1.14	3.88	—	6.7 IN3	6 AWG MAX 4
T38SS	1"	7.22	2.3	2.88	1.39	4.86	—	11.0 IN3	6 AWG MAX 4
T58SS	1-1/2"	8.18	2.58	3.56	1.94	5.82	—	24.3 IN3	6 AWG MAX 4
T68SS	2"	9.16	3.12	4.08	2.49	6.8	—	44.8 IN3	6 AWG MAX 4

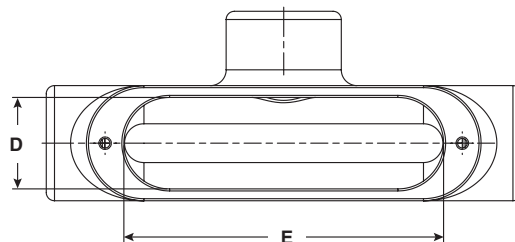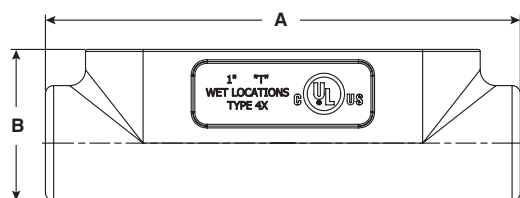

TB CONDUIT TYPE									
CATALOG NUMBER	HUB SIZE	DIMENSIONS						VOLUME	MAX CONDUCTOR FILL
		A	B	C	D	E	F		
TB28SS	3/4"	6.23	2.9	1.5	1.14	3.88	3.12	6.7 IN3	6 AWG MAX 4
TB38SS	1"	7.22	3.43	1.75	1.39	4.86	3.61	11.0 IN3	6 AWG MAX 3
TB58SS	1-1/2"	8.18	3.72	2.44	1.94	5.82	4.09	24.3 IN3	6 AWG MAX 3
TB68SS	2"	9.16	4.21	2.99	2.49	6.8	4.58	44.8 IN3	6 AWG MAX 3

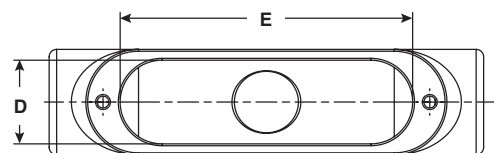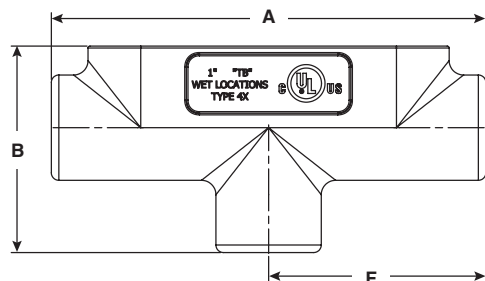

C CONDUIT TYPE									
CATALOG NUMBER	HUB SIZE	DIMENSIONS						VOLUME	MAX CONDUCTOR FILL
		A	B	C	D	E	F		
C28SS	3/4"	6.23	2.17	1.5	1.14	3.89	—	6.7 IN3	6 AWG MAX 4
C38SS	1"	7.22	2.38	1.75	1.39	4.88	—	11.0 IN3	4 AWG MAX 3
C58SS	1-1/2"	8.18	2.59	2.44	1.94	5.82	—	24.3 IN3	2 AWG MAX 3
C68SS	2"	9.16	3.13	2.99	2.49	6.8	—	44.8 IN3	1 AWG MAX 3

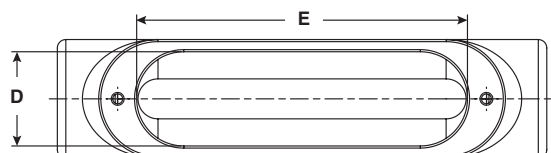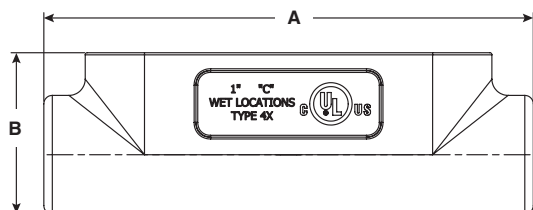



Killark's unique Top Entry T or "TET" fitting offers a safe way to install an electrical conduit body with unimpeded access for future maintenance or expansion projects for gantry and elevated industrial walkways. This patented design allows the access point to remain unblocked for the life of the electrical run and even allows for conductor pull for unrelated product, like light fixtures. The TET fitting is future proof and is the safest means for your electrical system.






FITTINGS

TET SERIES



Conduit Body

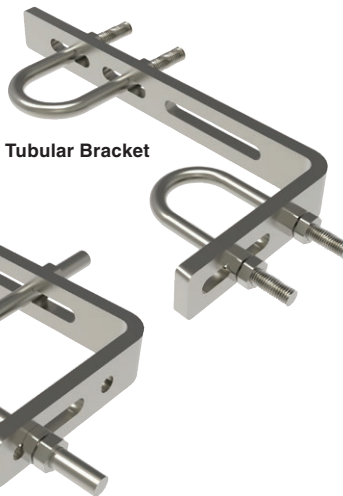

Tubular Bracket

Angular Bracket

UL514B & UL514A compliant

Suitable for use in Class 1 Div. 2 applications when installed in accordance to NEC Article 501.10 Type 4X rated with cover and gasket

 E3397

 E22699

FEATURES-SPECIFICATIONS

TET CONDUIT BODY

Features/Benefits

- Safer to Install for future access during maintenance
- Unimpeded access to the wiring chamber for splicing and pulling conductors
- Pull through for non-related products
- Future Proof – unable to block during expansion projects
- Type 4X rated
- Includes stainless steel cover and neoprene gasket
- Available with 3/4" side hubs – no need for a reducer



Materials/Finish

- Body – Aluminum or stainless steel
- Cover/Screws - 316 stainless steel
- Gasket – Neoprene
- Natural - Finish



MOUNTING BRACKETS

Features

- For Tubular and Angle Stanchion Mounting of Light Poles and Instruments for Stair and Walkway Rails
- High Vibration Installation
- Includes bolts, nuts, and washers

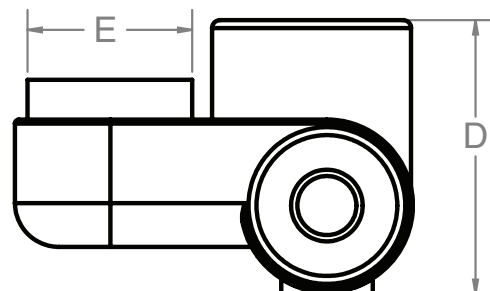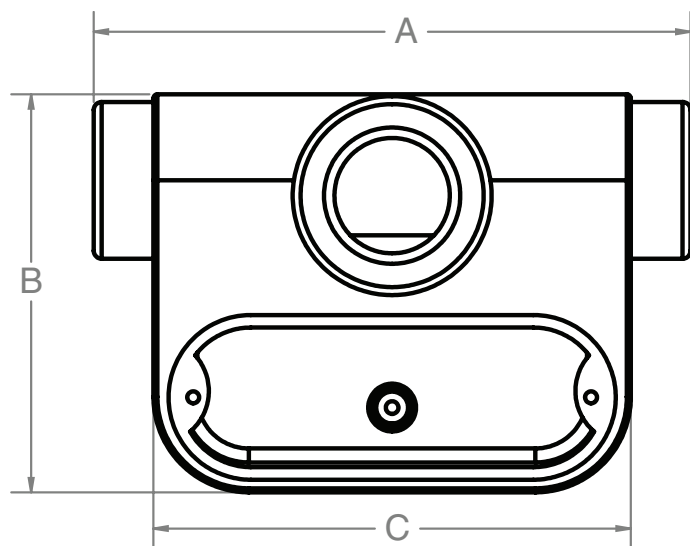

TET CONDUIT BODY										
CATALOG NUMBER	HUB SIZE		FINISH	ACCESSORIES	A	B	C	D	E	VOLUME
	TOP	SIDES								
TET15075A	1-1/2"	3/4"	Aluminum	N/A	7.5	5	6	3.44	2.07	33.5 in3 (548.8 cm3)
TET15075AD	1-1/2"	3/4"	Aluminum	Drain	7.5	5	6	3.44	2.07	33.5 in3 (548.8 cm3)
TET15075ABD	1-1/2"	3/4"	Aluminum	Drain/Breather	7.5	5	6	3.44	2.07	33.5 in3 (548.8 cm3)
TET15075SS	1-1/2"	3/4"	Stainless Steel	N/A	7.5	5	6	3.44	2.07	33.5 in3 (548.8 cm3)
TET150150SS	1-1/2"	1-1/2"	Stainless Steel	N/A	7.5	5	6	3.44	2.07	33.5 in3 (548.8 cm3)
TET100100SS	1"	1"	Stainless Steel	N/A	7.5	5	6	3.44	2.07	33.5 in3 (548.8 cm3)
TET07575SS	3/4"	3/4"	Stainless Steel	N/A	7.5	5	6	3.44	2.07	33.5 in3 (548.8 cm3)

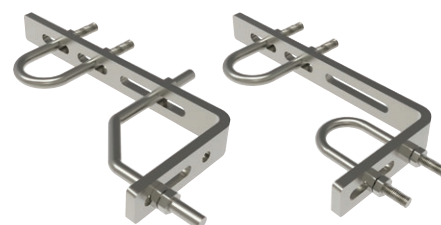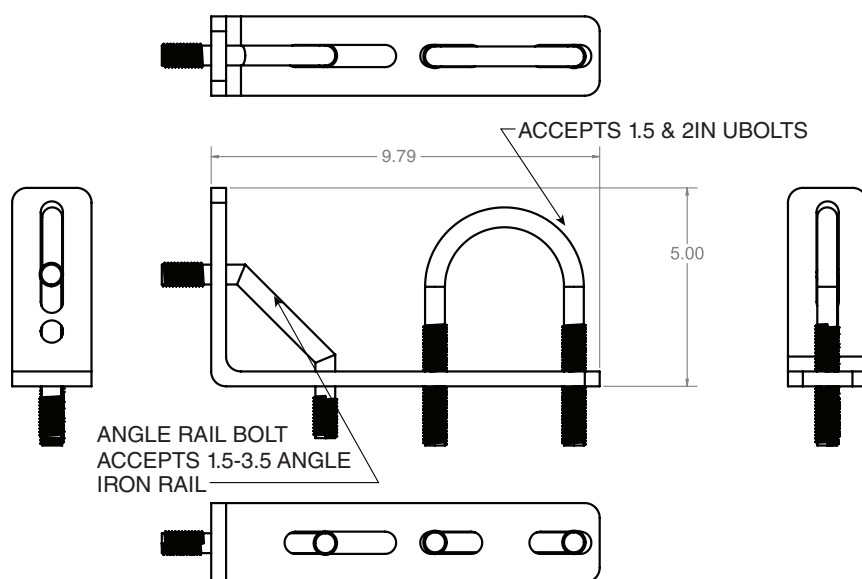

Angular Bracket

Tubular Bracket


MOUNTING BRACKETS		
CATALOG NUMBER	FINISH	TYPE OF BRACKET
MHK-RTG	Steel	Tubular (rounded)
MHK-RAG	Steel	Angular
MHK-RTS	Stainless Steel	Tubular (rounded)
MHK-RAS	Stainless Steel	Angular



FITTINGS

MO SERIES

IRON AND ALUMINUM MOGUL CONDUIT BODIES

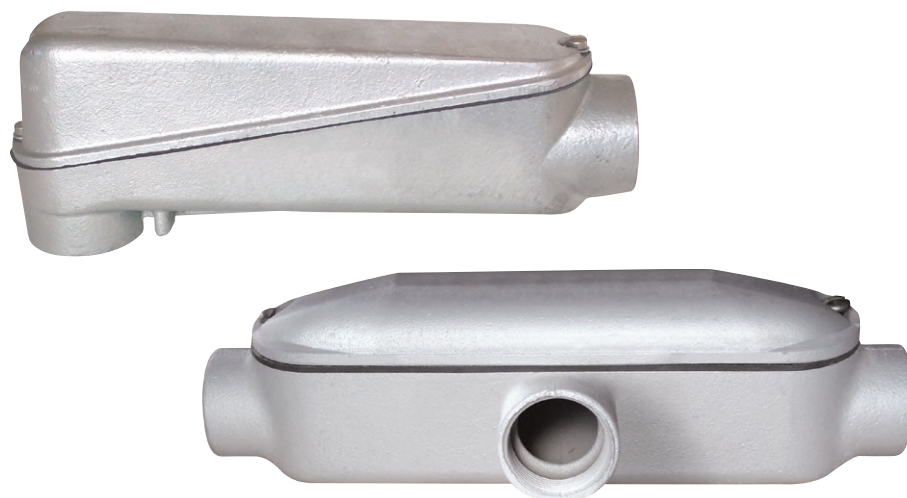

Suitable for wet locations when used with gasketed covers.

Federal Specification W-C-586D / A-A 50563.

Suitable for use in hazardous location applications when installed according to NEC Articles 501.10(b), Class I, Div. 2, (Suitable for use in Class I Zone 2 applications) 502.10, and 503.10.



FEATURES-SPECIFICATIONS

Features

- A raised dome cover permits additional wiring room
- Furnished with captive stainless steel screws and gasket
- LBD, C, and UB Series available with built-in cable-pulling rollers on sizes 1-½" and larger. Add -WR to catalog number. Example MOLBD-5-WR.

Materials

- Cast iron moguls are hot dipped galvanized
- Aluminum moguls are of copper-free aluminum (less than ¼ of 1%) with electrostatically applied powder coating



IRON AND ALUMINUM MOGUL CONDUIT BODIES



LB TYPE



C TYPE

LB TYPE MOGUL CONDUIT BODY


CATALOG NUMBER		HUB SIZE	LENGTH	ASSEMBLED HEIGHT	WIDTH	6X LENGTH
KILLARK ALUM.	KILLARK IRON					
MOLBD-1	MOLBD-1M	1/2"	5" (127)	2-5/16" (59)	1-5/16" (33)	3" (76)
MOLBD-2	MOLBD-2M	3/4"	6-1/4" (159)	2-5/8" (67)	1-9/16" (40)	4-1/2" (114)
MOLBD-3	MOLBD-3M	1"	9-5/8" (244)	3-5/8" (92)	2-1/2" (64)	7-1/2" (191)
MOLBD-4	MOLBD-4M	1-1/4"	9-5/8" (244)	3-5/8" (92)	2-1/2" (64)	7-1/2" (191)
MOLBD-5	MOLBD-5M	1-1/2"	14-7/16" (367)	5-5/8" (143)	3" (76)	12" (305)
MOLBD-6	MOLBD-6M	2"	14-7/16" (367)	5-5/8" (143)	3" (76)	12" (305)
MOLBD-7	MOLBD-7M	2-1/2"	22" (559)	7-1/2" (191)	4-1/2" (114)	18" (457)
MOLBD-8	MOLBD-8M	3"	22" (559)	7-1/2" (191)	4-1/2" (114)	18" (457)
MOLBD-9	MOLBD-9M	3-1/2"	28-1/2" (724)	9-1/4" (235)	5-1/2" (140)	24" (610)
MOLBD-0	MOLBD-0M	4"	28-1/2" (724)	9-1/4" (235)	5-1/2" (140)	24" (610)

NOTE - For built-in cable rollers (on sizes 1-1/2" and larger), add -WR to catalog number. Example: MOLBD-5WR.


C TYPE MOGUL CONDUIT BODY

CATALOG NUMBER		HUB SIZE	LENGTH	ASSEMBLED HEIGHT	WIDTH	8X LENGTH
KILLARK ALUM.	KILLARK IRON					
MOC-3	MOC-3M	1"	12" (305)	3" (76)	2-5/8" (67)	10" (254)
MOC-4	MOC-4M	1-1/4"	12-1/16" (306)	3-5/16" (84)	2-5/8" (67)	10" (254)
MOC-5	MOC-5M	1-1/2"	18-1/8" (460)	3-7/8" (98)	3-3/16" (81)	16" (406)
MOC-6	MOC-6M	2"	18-1/16" (459)	4-7/16" (113)	3-3/16" (81)	16" (406)
MOC-7	MOC-7M	2-1/2"	27-1/8" (689)	5-3/16" (132)	4-11/16" (119)	24" (610)
MOC-8	MOC-8M	3"	27-1/4" (692)	5-15/16" (151)	4-11/16" (119)	24" (610)
MOC-9	MOC-9M	3-1/2"	35-3/8" (899)	7-3/16" (183)	5-11/16" (144)	32" (813)
MOC-0	MOC-0M	4"	35-7/16" (900)	7-9/16" (192)	5-11/16" (144)	32" (813)


NOTE - For built-in cable rollers (on sizes 1-1/2" and larger), add -WR to catalog number. Example: MOLBD-5WR.

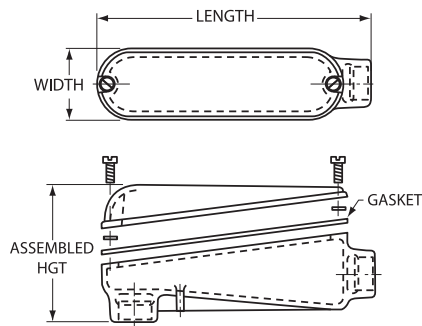

LB Sizes 1" thru 2"

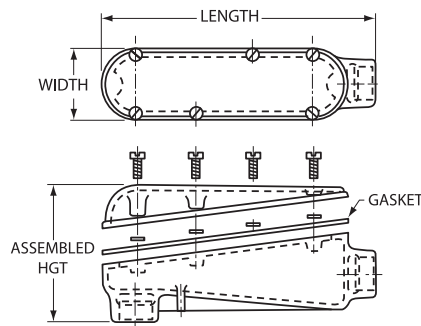

LB Sizes 2-1/2" thru 4"

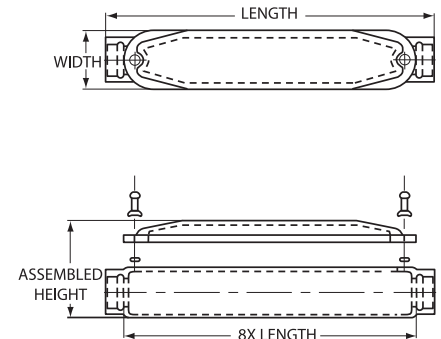

C Sizes



FITTINGS MO SERIES

IRON AND ALUMINUM MOGUL CONDUIT BODIES



T TYPE






UB TYPE

T TYPE						
CATALOG NUMBER		HUB SIZE	LENGTH	ASSEMBLED HEIGHT	WIDTH	8X LENGTH
KILLARK ALUM.	KILLARK IRON					
MOT-3	MOT-3M	1"	12" (305)	3" (76)	2-5/8" (67)	10" (254)
MOT-4	MOT-4M	1-1/4"	12-1/16" (306)	3-5/16" (84)	2-5/8" (67)	10" (254)
MOT-5	MOT-5M	1-1/2"	18-1/8" (460)	3-7/8" (98)	3-3/16" (81)	16" (406)
MOT-6	MOT-6M	2"	18-1/16" (459)	4-7/16" (113)	3-3/16" (81)	16" (406)
MOT-7	MOT-7M	2-1/2"	27-1/8" (689)	5-3/16" (132)	4-11/16" (119)	24" (610)
MOT-8	MOT-8M	3"	27-1/4" (692)	5-15/16" (151)	4-11/16" (119)	24" (610)
MOT-9	MOT-9M	3-1/2"	35-3/8" (899)	7-3/16" (183)	5-11/16" (144)	32" (813)
MOT-0	MOT-0M	4"	35-7/16" (900)	7-9/16" (192)	5-11/16" (144)	32" (813)

UB TYPE						
CATALOG NUMBER		HUB SIZE	LENGTH	ASSEMBLED HEIGHT	WIDTH	6X LENGTH
KILLARK ALUM.	KILLARK IRON					
MOUB-3	MOUB-3M	1"	10-7/16" (265)	3-7/8" (98)	2-5/8" (67)	7-1/2" (191)
MOUB-4	MOUB-4M	1-1/4"	10-7/16" (265)	4-3/16" (106)	2-5/8" (67)	7-1/2" (191)
MOUB-5	MOUB-5M	1-1/2"	15-9/16" (395)	5-1/8" (130)	3-3/16" (81)	12" (305)
MOUB-6	MOUB-6M	2"	15-9/16" (395)	5-3/4" (146)	3-3/16" (81)	12" (305)
MOUB-7	MOUB-7M	2-1/2"	23-1/16" (586)	8-1/2" (216)	4-11/16" (119)	18" (457)
MOUB-8	MOUB-8M	3"	23-5/16" (668)	8-1/2" (216)	4-11/16" (119)	18" (457)
MOUB-9	MOUB-9M	3-1/2"	30" (762)	10-3/8" (264)	5-11/16" (144)	24" (610)
MOUB-0	MOUB-0M	4"	30" (762)	10-3/8" (264)	5-11/16" (144)	24" (610)


NOTE - For built-in cable rollers (on sizes 1-1/2" and larger), add -WR to catalog number. Example: MOLBD-5WR.

DIMENSIONS

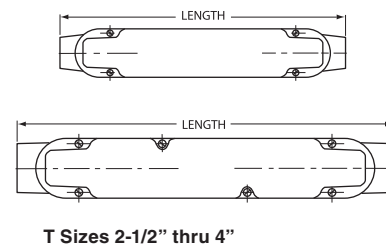




MOGUL CONDUIT BODIES

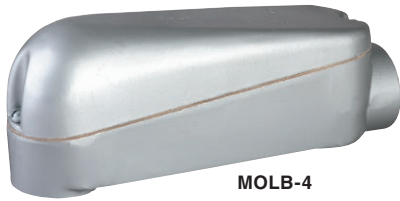

MOLB-4



MOLB-5 thru 0

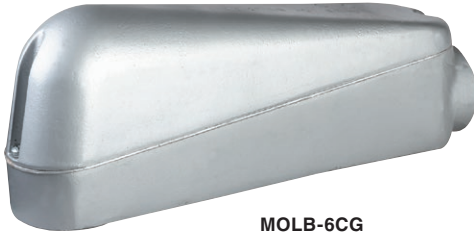

MOLB-6CG



MLB-12

Suitable for wet locations when used with gasketed covers.
Federal Specification W-C-586D / A-A 50563.

Suitable for use in hazardous location applications when installed according to NEC Articles 501.10(b), Class I, Div. 2, (Suitable for use in Class I Zone 2 applications) 502.10, and 503.10.



FEATURES-SPECIFICATIONS

Features

- A raised dome cover provides additional wiring room
- Furnished with cover and gasket

Materials

Copper-free Aluminum
(less than 4/10 of 1%)

- Electrostatically applied powder coating



FITTINGS

MOL SERIES


MOGUL CONDUIT BODIES

MOL CONDUIT BODIES									
CATALOG NUMBER	CONDUIT SIZE	DIMENSIONS							
		A	B	C	D	E	F	G	J
MOLB-4*	1-1/4"	5/16" (8)	9-3/4" (248)	2-3/4" (70)	8-1/2" (445)	1" (25)	2-3/8" (60)	9-1/8" (232)	2-3/4" (70)
MOLB-5	1-1/2"	1-5/16" (33)	13-3/16" (335)	4-3/4" (121)	11-1/2" (292)	2-3/8" (60)	3-1/8" (79)	12-7/8" (327)	3-3/8" (86)
MOLB-6	2"	1-1/16" (27)	13-3/16" (335)	4-1/4" (108)	11-1/2" (292)	2-1/2" (64)	3-1/8" (79)	12-7/8" (327)	3-3/8" (86)
MOLB-6CG*	2"	1/16" (2)	14-1/2" (368)	5-3/4" (146)	13" (330)	1-3/8" (35)	3" (76)	14-1/8" (359)	3-5/16" (84)
MOLB-7	2-1/2"	1-13/16" (46)	22-5/8" (575)	6-1/4" (159)	20" (508)	3-15/16" (100)	4-7/16" (113)	21-13/16" (554)	4-7/16" (113)
MOLB-8	3"	1-13/16" (46)	22-5/8" (575)	6-1/4" (169)	20" (508)	3-15/16" (100)	4-7/16" (113)	21-13/16" (554)	4-7/16" (113)
MOLB-9	3-1/2"	1-9/16" (40)	28-11/16" (729)	7-7/8" (200)	25-9/16" (649)	4-3/16" (106)	5-1/2" (140)	28-5/16" (719)	5-1/2" (140)
MOLB-0	4"	1-9/16" (40)	28-11/16" (729)	7-7/8" (200)	25-7/16" (646)	4-3/16" (106)	5-1/2" (140)	28-5/16" (719)	5-1/2" (140)

*Split cover design

MOL BLANK REPLACEMENT COVERS AND GASKETS	
CATALOG NUMBER	BODY STYLE
MOL-560	1-1/2" & 2"
MOL-780	2-1/2" & 3"
MOL-900	3-1/2" & 4"

DIMENSIONS

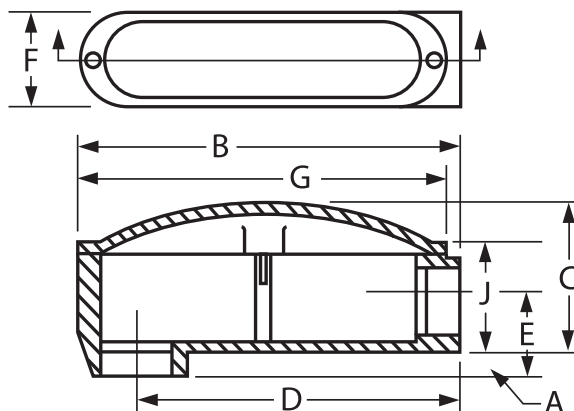



NECLB-6

Suitable for wet locations when used with gasketed covers.

Federal Specification W-C-586D / A-A 50563.

Suitable for use in hazardous location applications when installed according to NEC Articles 501.10(b), Class I, Div. 2, (Suitable for use in Class I Zone 2 applications) 502-.10 and 503.10.



FEATURES-SPECIFICATIONS

Features

- Large cover opening (length of opening exceeds six times the trade diameter of the hub size) for easy access to conductors. Cover and gasket included
- A pull box with easy access to conductors
- A chamber with a large opening for easy access to perform changes in the conduit system
- Includes cover and gasket

Materials

Copper-free Aluminum
(less than $\frac{4}{10}$ of 1%)

- Electrostatically applied powder coating




FITTINGS

NECLB SERIES

40% FILL CONDUIT BODIES

NECLB CONDUIT BODIES												
CATALOG NUMBER	REPLACEMENT COVER AND GASKET	HUB SIZE	A	B	C	D	E	F	G	H	J	K
NECLB-3	NECLB-30	1"	8-1/8"	3-7/16"	2"	11-9/32"	6"	2"	1-1/8"	3-1/8"	7"	1 NPT
NECLB-4	NECLB-40	1-1/4"	9-7/8"	4-1/16"	2-3/8"	11-5/16"	7-1/2"	2-1/2"	1-3/16"	3-11/16"	8-5/8"	1-1/4 NPT
NECLB-5	NECLB-50	1-1/2"	11-17/32"	5-1/16"	2-3/4"	2-3/16"	9"	3-1/2"	1-3/16"	4-11/16"	10-5/8"	1-1/2 NPT
NECLB-6	NECLB-60	2"	14-25/32"	6-3/16"	3"	2-11/16"	12"	4"	1-3/16"	5-3/16"	13-11/16"	2 NPT

DIMENSIONS

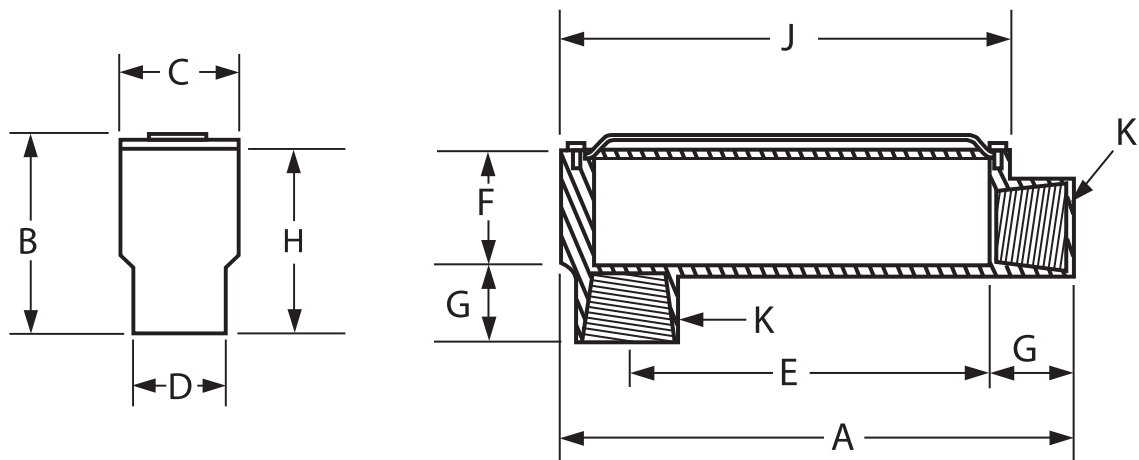





FITTINGS E SERIES

ALUMINUM - CONDUIT BODIES

UL E195978 - Standard 514B
SP 2380786 - C22.2 #18

FEATURES-SPECIFICATIONS

Features

- Flat back design for easy mounting close to walls
- Cast of high strength, corrosion and weather resistant aluminum alloy with painted finish



Material

- May be used on aluminum or steel conduit
- Lightweight, makes installation simple
- Ideal for commercial and light industrial applications
- High grade die cast aluminum





Type LB

TYPE LB							
CATALOG NUMBER	CONDUIT SIZE	DIMENSIONS					
		A	B	C	D	E	F
EALB-1	1/2"	1-5/16"	3-7/8"	1/2"	2-1/8"	4-3/8"	1-1/16"
EALB-2	3/4"	1-1/2"	4-5/8"	3/4"	2-7/16"	5-1/8"	1-11/32"
EALB-3	1"	1-3/4"	5-3/8"	1"	2-13/16"	5-15/16"	1-21/32"
EALB-4	1-1/4"	2-1/2"	6-5/8"	1-1/4"	3-3/4"	6-7/8"	2-1/4"
EALB-5	1-1/2"	2-1/2"	6-5/8"	1-1/2"	3-3/4"	6-7/8"	2-1/4"
EALB-6	2"	3-1/8"	8-1/2"	2"	4-1/8"	9-7/32"	2-15/16"
EALB-7	2-1/2"	4-9/16"	12-1/4"	2-1/2"	5-13/16"	13-1/8"	3-7/16"
EALB-8	3"	4-9/16"	12-1/4"	3"	5-13/16"	13-1/8"	4-7/64"
EALB-9	3-1/2"	5-7/16"	14-7/8"	3-1/2"	7-1/4"	15-3/8"	5-9/64"
EALB-10	4"	5-7/16"	14-7/8"	4"	7-1/4"	15-3/8"	5-9/64"

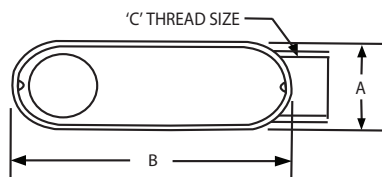


Type C

TYPE C							
CATALOG NUMBER	CONDUIT SIZE	DIMENSIONS					
		A	B	C	D	E	F
EAC-1	1/2"	1-5/16"	3-7/8"	1/2"	1-7/16"	4-29/32"	1-1/16"
EAC-2	3/4"	1-1/2"	4-5/8"	3/4"	1-11/16"	5-1/2"	1-11/32"
EAC-3	1"	1-3/4"	5-3/8"	1"	1-15/16"	6-7/16"	1-21/32"
EAC-4	1-1/4"	2-1/2"	6-5/8"	1-1/4"	2-7/8"	8-7/16"	2-1/4"
EAC-5	1-1/2"	2-1/2"	6-5/8"	1-1/2"	2-7/8"	8-7/16"	2-1/4"
EAC-6	2"	3-1/8"	8-1/2"	2"	3-7/16"	10-3/4"	2-15/16"
EAC-7	2-1/2"	4-9/16"	12-1/4"	2-1/2"	4"	14"	3-7/16"
EAC-8	3"	4-9/16"	12-1/4"	3"	4-3/4"	13-1/2"	4-7/64"
EAC-9	3-1/2"	5-7/16"	14-7/8"	3-1/2"	5-1/2"	15-29/32"	5-9/64"
EAC-10	4"	5-7/16"	14-7/8"	4"	5-1/2"	15-29/32"	5-9/64"

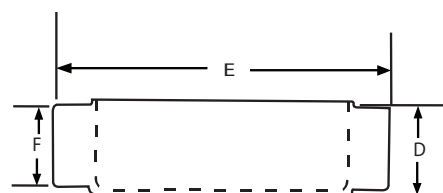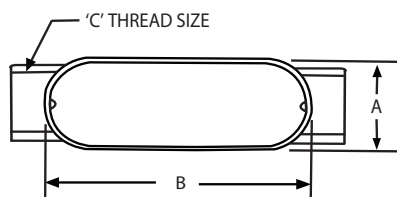





ALUMINUM - CONDUIT BODIES

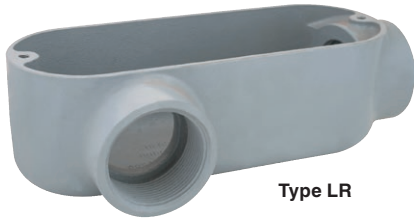



Type LR

TYPE LR							
CATALOG NUMBER	CONDUIT SIZE	DIMENSIONS					
		A	B	C	D	E	F
EALR-1	1/2"	1-5/16"	3-7/8"	1/2"	2-3/64"	4-3/8"	1-7/16"
EALR-2	3/4"	1-1/2"	4-5/8"	3/4"	2-5/16"	5-1/8"	1-11/16"
EALR-3	1"	1-3/4"	5-3/8"	1"	2-21/32"	5-15/16"	1-15/16"
EALR-4	1-1/4"	2-1/2"	6-5/8"	1-1/4"	3-15/32"	6-7/8"	2-7/8"
EALR-5	1-1/2"	2-1/2"	6-5/8"	1-1/2"	3-15/32"	6-7/8"	2-7/8"
EALR-6	2"	3-1/8"	8-1/2"	2"	3-7/8"	9-7/32"	3-7/16"
EALR-7	2-1/2"	4-9/16"	12-1/4"	2-1/2"	6"	13-1/8"	4"
EALR-8	3"	4-9/16"	12-1/4"	3"	6"	13-1/8"	4-3/4"
EALR-9	3-1/2"	5-7/16"	14-7/8"	3-1/2"	6-1/4"	15-3/8"	5-1/2"
EALR-10	4"	5-7/16"	14-7/8"	4"	6-1/4"	15-3/8"	5-1/2"

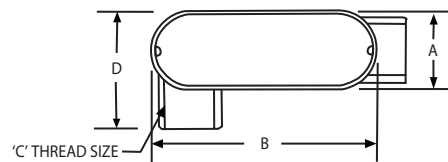



Type LL

TYPE LL							
CATALOG NUMBER	CONDUIT SIZE	DIMENSIONS					
		A	B	C	D	E	F
EALL-1	1/2"	1-5/16"	3-7/8"	1/2"	2-3/64"	4-3/8"	1-7/16"
EALL-2	3/4"	1-1/2"	4-5/8"	3/4"	2-5/16"	5-1/8"	1-11/16"
EALL-3	1"	1-3/4"	5-3/8"	1"	2-21/32"	5-15/16"	1-15/16"
EALL-4	1-1/4"	2-1/2"	6-5/8"	1-1/4"	3-15/32"	6-7/8"	2-7/8"
EALL-5	1-1/2"	2-1/2"	6-5/8"	1-1/2"	3-15/32"	6-7/8"	2-7/8"
EALL-6	2"	3-1/8"	8-1/2"	2"	3-7/8"	9-7/32"	3-7/16"
EALL-7	2-1/2"	4-9/16"	12-1/4"	2-1/2"	6"	13-1/8"	4"
EALL-8	3"	4-9/16"	12-1/4"	3"	6"	13-1/8"	4-3/4"
EALL-9	3-1/2"	5-7/16"	14-7/8"	3-1/2"	6-1/4"	15-3/8"	5-1/2"
EALL-10	4"	5-7/16"	14-7/8"	4"	6-1/4"	15-3/8"	5-1/2"



Type T

TYPE T							
CATALOG NUMBER	CONDUIT SIZE	DIMENSIONS					
		A	B	C	D	E	F
EAT-1	1/2"	1-5/16"	3-7/8"	1/2"	1-7/16"	4-29/32"	2-1/8"
EAT-2	3/4"	1-1/2"	4-5/8"	3/4"	1-11/16"	5-1/2"	2-11/32"
EAT-3	1"	1-3/4"	5-3/8"	1"	1-15/16"	6-7/16"	2-21/32"
EAT-4	1-1/4"	2-1/2"	6-5/8"	1-1/4"	2-7/8"	8-7/16"	3-19/32"
EAT-5	1-1/2"	2-1/2"	6-5/8"	1-1/2"	2-7/8"	8-7/16"	3-19/32"
EAT-6	2"	3-1/8"	8-1/2"	2"	3-7/16"	10-3/4"	4-1/32"
EAT-7	2-1/2"	4-9/16"	12-1/4"	2-1/2"	4"	14"	6-1/4"
EAT-8	3"	4-9/16"	12-1/4"	3"	4-3/4"	13-1/2"	6-1/4"
EAT-9	3-1/2"	5-7/16"	14-7/8"	3-1/2"	5-1/2"	15-29/32"	7"
EALB-10	4"	5-7/16"	14-7/8"	4"	5-1/2"	15-29/32"	7"





FITTINGS E SERIES

ALUMINUM - CONDUIT BODIES

UL E195978 - Standard 514B
SP 2380786 - C22.2 #18

FEATURES-SPECIFICATIONS




Features

- Flat back design for easy mounting close to walls
- Cast of high strength, corrosion and weather resistant aluminum alloy with painted finish
- May be used on aluminum or steel conduit
- Lightweight, makes installation simple





Type C

TYPE C							
CATALOG NUMBER	CONDUIT SIZE	DIMENSIONS					
		A	B	C	D	E	F
EBC-1	1/2"	1-5/16"	3-7/8"	1/2"	1-7/16"	4-29/32"	1-1/16"
EBC-2	3/4"	1-1/2"	4-5/8"	3/4"	1-11/16"	5-1/2"	1-11/32"
EBC-3	1"	1-3/4"	5-3/8"	1"	1-15/16"	6-7/16"	1-21/32"
EBC-4	1-1/4"	2-1/2"	6-5/8"	1-1/4"	2-7/8"	8-7/16"	2-1/4"
EBC-5	1-1/2"	2-1/2"	6-5/8"	1-1/2"	2-7/8"	8-7/16"	2-1/4"
EBC-6	2"	3-1/8"	8-1/2"	2"	3-7/16"	10-3/4"	2-15/16"

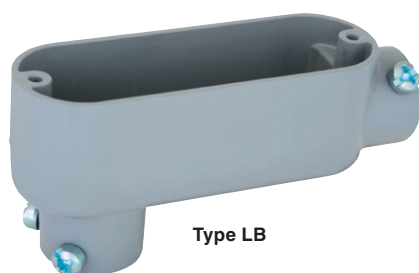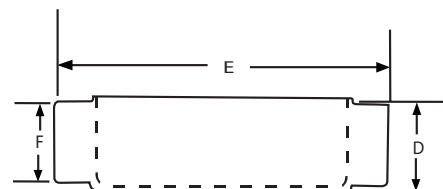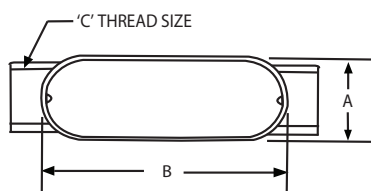

Type LB

TYPE LB							
CATALOG NUMBER	CONDUIT SIZE	DIMENSIONS					
		A	B	C	D	E	F
EBLB-1	1/2"	1-5/16"	3-7/8"	1/2"	2-1/8"	4-3/8"	1-1/16"
EBLB-2	3/4"	1-1/2"	4-5/8"	3/4"	2-7/16"	5-1/8"	1-11/32"
EBLB-3	1"	1-3/4"	5-3/8"	1"	2-13/16"	5-15/16"	1-21/32"
EBLB-4	1-1/4"	2-1/2"	6-5/8"	1-1/4"	3-3/4"	6-7/8"	2-1/4"
EBLB-5	1-1/2"	2-1/2"	6-5/8"	1-1/4"	3-3/4"	6-7/8"	2-1/4"
EBLB-6	2"	3-1/8"	8-1/2"	2"	4-1/8"	9-7/32"	2-15/16"
EBLB-7	2-1/2"	4-9/16"	12-1/4"	2-1/2"	5-13/16"	13-1/8"	3-7/16"
EBLB-8	3"	4-9/16"	12-1/4"	3"	5-13/16"	13-1/8"	4-7/64"
EBLB-9	3-1/2"	5-7/16"	14-7/8"	3-1/2"	7-1/4"	15-3/8"	5-9/64"
EBLB-10	4"	5-7/16"	14-7/8"	4"	7-1/4"	15-3/8"	5-9/64"

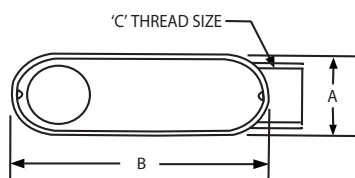




ALUMINUM - CONDUIT BODIES




Type LL

TYPE LL							
CATALOG NUMBER	CONDUIT SIZE	DIMENSIONS					
		A	B	C	D	E	F
EBLL-1	1/2"	1-5/16"	3-7/8"	1/2"	2-3/64"	4-3/8"	1-7/16"
EBLL-2	3/4"	1-1/2"	4-5/8"	3/4"	2-5/16"	5-1/8"	1-11/16"
EBLL-3	1"	1-3/4"	5-3/8"	1"	2-21/32"	5-15/16"	1-15/16"
EBLL-4	1-1/4"	2-1/2"	6-5/8"	1-1/4"	3-15/32"	6-7/8"	2-7/8"
EBLL-5	1-1/2"	2-1/2"	6-5/8"	1-1/2"	3-15/32"	6-7/8"	2-7/8"
EBLL-6	2"	3-1/8"	8-1/2"	2"	3-7/8"	9-7/32"	3-7/16"

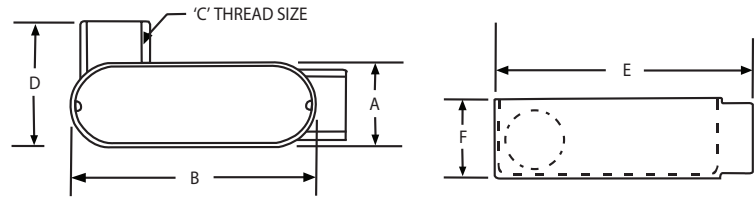


Type LR

TYPE LR							
CATALOG NUMBER	CONDUIT SIZE	DIMENSIONS					
		A	B	C	D	E	F
EBLR-1	1/2"	1-5/16"	3-7/8"	1/2"	2-3/64"	4-3/8"	1-7/16"
EBLR-2	3/4"	1-1/2"	4-5/8"	3/4"	2-15/16"	5-1/8"	1-11/16"
EBLR-3	1"	1-3/4"	5-3/8"	1"	2-21/32"	5-15/16"	1-15/16"
EBLR-4	1-1/4"	2-1/2"	6-5/8"	1-1/4"	3-15/32"	6-7/8"	2-7/8"
EBLR-5	1-1/2"	2-1/2"	6-5/8"	1-1/2"	3-15/32"	6-7/8"	2-7/8"
EBLR-6	2"	3-1/8"	8-1/2"	2"	3-7/8"	9-7/32"	3-7/16"

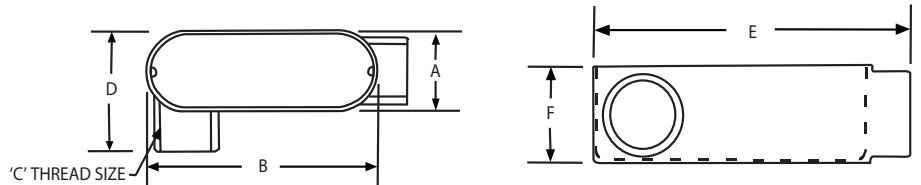

Type T

TYPE T							
CATALOG NUMBER	CONDUIT SIZE	DIMENSIONS					
		A	B	C	D	E	F
EBT-1	1/2"	1-5/16"	3-7/8"	1/2"	1-7/16"	4-29/32"	2-1/8"
EBT-2	3/4"	1-1/2"	4-5/8"	3/4"	1-11/16"	5-1/2"	2-11/32"
EBT-3	1"	1-3/4"	5-3/8"	1"	1-15/16"	6-7/16"	2-21/32"
EBT-4	1-1/4"	2-1/2"	6-5/8"	1-1/4"	2-7/8"	8-7/16"	3-19/32"
EBT-5	1-1/2"	2-1/2"	6-5/8"	1-1/2"	2-7/8"	8-7/16"	3-19/32"
EBT-6	2"	3-1/8"	8-1/2"	2"	3-7/16"	10-3/4"	4-1/16"

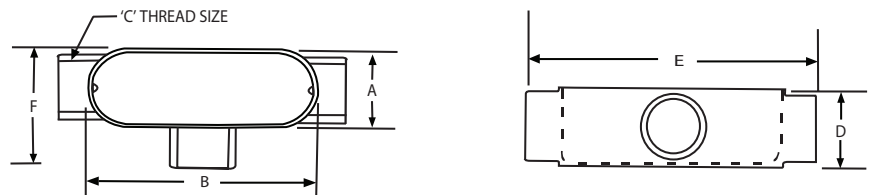



FITTINGS E SERIES

ALUMINUM - ENTRANCE ELLS

UL E195978 - Standard 514B
SP 2380786 - C22.2 #18

FEATURES-SPECIFICATIONS

Features


- Lightweight aluminum construction eases installation and provides a corrosion resistance
- Removable cover and gasket allows for easier wire pulling and access to the raceway



EASLB

DIMENSIONS				
CATALOG NUMBER	TRADE SIZE	A	B	C
EASLB-1	1/2"	10	100	—
EASLB-2	3/4"	10	50	—
EASLB-3	1"	6	24	—
EASLB-4	1-1/4"	2	8	—
EASLB-5	1-1/2"	2	8	—
EASLB-6	2"	1	5	—

Service Entrance

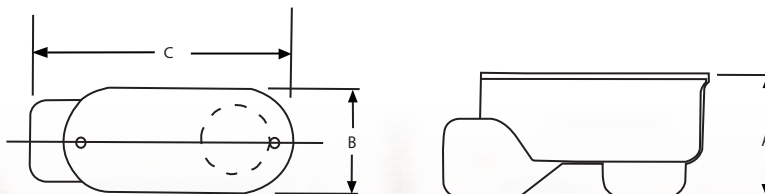



ALUMINUM - COVERS AND GASKETS

UL E195978 - Standard 514B
SP 2380786 - C22.2 #18

FEATURES-SPECIFICATIONS

Features

Covers

- Lightweight aluminum construction provides corrosion resistance and easy installation
- Covers are furnished with zinc plated screws-no worry about removing a cover once it is installed

Gaskets


- Gasket materials available: neoprene

GASKETS - NEOPRENE TYPE			
CATALOG NUMBER	TRADE SIZE	DIMENSIONS	
		A	B
EGKN-1	1/2"	1-3/8"	3-29/32"
EGKN-2	3/4"	1-9/16"	4-11/16"
EGKN-3	1"	1-25/32"	5-3/8"
EGKN-4	1-1/4" - 1-1/2"	2-1/2"	7-1/4"
EGKN-5	2"	3-1/8"	9-1/2"
EGKN-6	2-1/2" - 3"	4-1/2"	12-1/4"
EGKN-7	3-1/2" - 4"	5-29/64"	14-13/64"

COVER			
CATALOG NUMBER	TRADE SIZE	DIMENSIONS	
		A	B
ESCV-1	1/2"	1-3/8"	3-29/32"
ESCV-2	3/4"	1-9/16"	4-11/16"
ESCV-3	1"	1-25/32"	5-3/8"
ESCV-4	1-1/4" - 1-1/2"	2-1/2"	7-1/4"
ESCV-5	2"	3-1/8"	9-1/2"
ESCV-6	2-1/2" - 3"	4-1/2"	12-1/4"
ESCV-7	3-1/2" - 4"	5-29/64"	14-13/64"



Cover

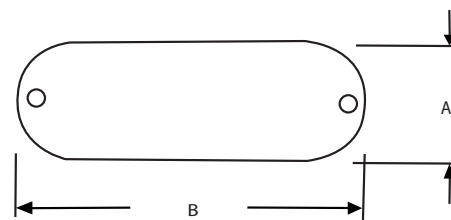



FITTINGS E SERIES

ALUMINUM - COVER AND GASKET INCLUDED

UL E195978 - Standard 514B
SP 2380786 - C22.2 #18

FEATURES-SPECIFICATIONS



Features

- Assembled with cover and gasket to speed installation - installer has all components needed
- Flat back design for easy mounting close to walls
- Cast of high strength, corrosion, and weather resistant aluminum alloy with painted finish
- May be used on aluminum or steel conduit
- Lightweight, makes installation simple
- Unique E-PAK™ packaging serves as a shipping and display carton





Type LB

TYPE LB								
CATALOG NUMBER	CONDUIT SIZE	DIMENSIONS						E PAK CTN
		A	B	C	D	E	F	
EALB-1CGN	1/2"	1-5/16"	3-7/8"	1/2"	2-7/8"	4-3/32"	1-1/16"	10
EALB-2CGN	3/4"	1-1/2"	4-5/8"	3/4"	2-7/16"	5-1/8"	1-11/32"	10
EALB-3CGN	1"	1-3/4"	5-3/8"	1"	2-13/16"	6-15/16"	1-21/32"	5
EALB-4CGN	1-1/4"	2-1/2"	6-5/8"	1-1/4"	3-3/4"	6-7/8"	2-1/4"	2
EALB-5CGN	1-1/2"	2-1/2"	6-5/8"	1-1/2"	3-3/4"	6-7/8"	2-1/4"	2
EALB-6CGN	2"	3-1/8"	8-1/2"	2"	4-1/8"	9-7/32"	2-15/16"	1
EALB-7CGN	2-1/2"	4-9/16"	12-1/4"	2-1/2"	5-13/16"	13-1/8"	3-7/16"	1
EALB-8CGN	3"	4-9/16"	12-1/4"	3"	5-13/16"	13-1/8"	4-7/64"	1
EALB-9CGN	3-1/2"	5-7/16"	14-7/8"	3-1/2"	7-1/4"	15-3/8"	5-9/64"	1
EALB-10CGN	4"	5-7/16"	14-7/8"	4"	7-1/4"	15-3/8"	5-9/64"	1

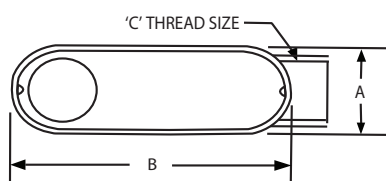

Type C

TYPE C								
CATALOG NUMBER	CONDUIT SIZE	DIMENSIONS						E PAK CTN
		A	B	C	D	E	F	
EAC-1CGN	1/2"	1-5/16"	3-7/8"	1/2"	1-7/16"	4-29/32"	1-1/16"	10
EAC-2CGN	3/4"	1-1/2"	4-5/8"	3/4"	1-11/16"	5-1/2"	1-11/32"	10
EAC-3CGN	1"	1-3/4"	5-3/8"	1"	1-15/16"	6-7/16"	1-21/32"	5
EAC-4CGN	1-1/4"	2-1/2"	6-5/8"	1-1/4"	2-7/8"	8-7/16"	2-1/4"	2
EAC-5CGN	1-1/2"	2-1/2"	6-5/8"	1-1/2"	2-7/8"	8-7/16"	2-1/4"	2
EAC-6CGN	2"	3-1/8"	8-1/2"	2"	3-7/16"	10-3/4"	2-15/16"	1
EAC-7CG	2-1/2"	4-9/16"	12-1/4"	2-1/2"	4"	14"	3-7/16"	1
EAC-8CG	3"	4-9/16"	12-1/4"	3"	4-3/4"	13-1/2"	4-7/64"	1
EAC-9CG	3-1/2"	5-7/16"	14-7/8"	3-1/2"	5-1/2"	15-29/32"	5-9/64"	1
EAC-10CG	4"	5-7/16"	14-7/8"	4"	5-1/2"	15-29/32"	5-9/64"	1

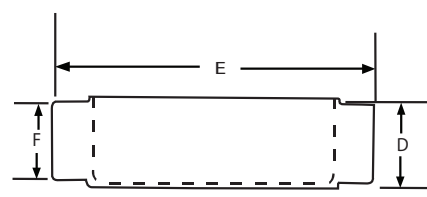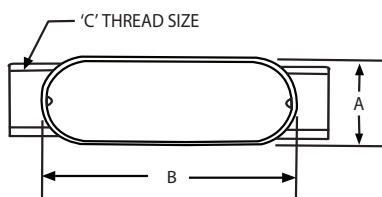





ALUMINUM - COVER AND GASKET INCLUDED





Type LL

TYPE LL								
CATALOG NUMBER	CONDUIT SIZE	DIMENSIONS						E PAK CTN
		A	B	C	D	E	F	
EALL-1CGN	1/2"	1-5/16"	3-7/8"	1/2"	2-3/64"	4-3/8"	1-7/16"	10
EALL-2CGN	3/4"	1-1/2"	4-5/8"	3/4"	2-5/16"	5-1/8"	1-11/16"	10
EALL-3CGN	1"	1-3/4"	5-3/8"	1"	2-21/32"	5-15/16"	1-15/16"	5
EALL-4CGN	1-1/4"	2-1/2"	6-5/8"	1-1/4"	3-15/32"	6-7/8"	2-7/8"	2
EALL-5CGN	1-1/2"	2-1/2"	6-5/8"	1-1/2"	3-15/32"	6-7/8"	2-7/8"	2
EALL-6CGN	2"	3-1/8"	8-1/2"	2"	3-7/8"	9-7/32"	3-7/16"	1
EALL-7CG	2-1/2"	4-9/16"	12-1/4"	2-1/2"	6"	13-1/8"	4"	1
EALL-8CG	3"	4-9/16"	12-1/4"	3"	6"	13-1/8"	4-3/4"	1
EALL-9CG	3-1/2"	5-7/16"	14-7/8"	3-1/2"	6-1/4"	15-3/8"	5-1/2"	1
EALL-10CG	4"	5-7/16"	14-7/8"	4"	6-1/4"	15-3/8"	5-1/2"	1



Type LR

TYPE LR								
CATALOG NUMBER	CONDUIT SIZE	DIMENSIONS						E PAK CTN
		A	B	C	D	E	F	
EALR-1CGN	1/2"	1-5/16"	3-7/8"	1/2"	2-3/64"	4-3/8"	1-7/16"	10
EALR-2CGN	3/4"	1-1/2"	4-5/8"	3/4"	2-5/16"	5-1/8"	1-11/16"	10
EALR-3CGN	1"	1-3/4"	5-3/8"	1"	2-21/32"	5-15/16"	1-15/16"	5
EALR-4CGN	1-1/4"	2-1/2"	6-5/8"	1-1/4"	3-15/32"	6-7/8"	2-7/8"	2
EALR-5CGN	1-1/2"	2-1/2"	6-5/8"	1-1/2"	3-15/32"	6-7/8"	2-7/8"	2
EALR-6CGN	2"	3-1/8"	8-1/2"	2"	3-7/8"	9-7/32"	3-7/16"	1
EALR-7CG	2-1/2"	4-9/16"	12-1/4"	2-1/2"	6"	13-1/8"	4"	1
EALR-8CG	3"	4-9/16"	12-1/4"	3"	6"	13-1/8"	4-3/4"	1
EALR-9CG	3-1/2"	5-7/16"	14-7/8"	3-1/2"	6-1/4"	15-3/8"	5-1/2"	1
EALR-10CG	4"	5-7/16"	14-7/8"	4"	6-1/4"	15-3/8"	5-1/2"	1

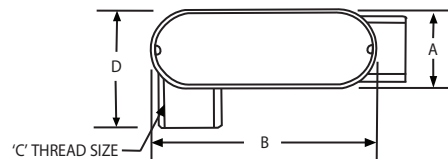

Type T

TYPE T								
CATALOG NUMBER	CONDUIT SIZE	DIMENSIONS						E PAK CTN
		A	B	C	D	E	F	
EAT-1CGN	1/2"	1-5/16"	3-7/8"	1/2"	1-7/16"	4-29/32"	2-1/8"	10
EAT-2CGN	3/4"	1-1/2"	4-5/8"	3/4"	1-11/16"	5-1/2"	2-11/32"	10
EAT-3CGN	1"	1-3/4"	5-3/8"	1"	1-15/16"	6-7/16"	2-21/32"	5
EAT-4CGN	1-1/4"	2-1/2"	6-5/8"	1-1/4"	2-7/8"	8-7/16"	3-19/32"	2
EAT-5CGN	1-1/2"	2-1/2"	6-5/8"	1-1/2"	2-7/8"	8-7/16"	3-19/32"	2
EAT-6CGN	2"	3-1/8"	8-1/2"	2"	3-7/16"	10-3/4"	4-1/32"	1
EAT-7CG	2-1/2"	4-9/16"	12-1/4"	2-1/2"	4"	14"	6-1/4"	1
EAT-8CG	3"	4-9/16"	12-1/4"	3"	4-3/4"	13-1/2"	6-1/4"	1
EAT-9CG	3-1/2"	5-7/16"	14-7/8"	3-1/2"	5-1/2"	15-29/32"	7"	1
EALB-10CG	4"	5-7/16"	14-7/8"	4"	5-1/2"	15-29/32"	7"	1

